



PART NO. CA-U702001-02.0

REVISIONS				
LTR	DESCRIPTION	DATE	APPROVED	
A	INITIAL RELEASE SEE DO 4001	JL 05-01-00	A.J.	
B	SEE DO 4061	JL 06-27-00	A.J.	
C	SEE DO 4698	CP 11-29-01	A.J.	
D	SEE DO 5646	CP 11-17-04	L.F.	
E	SEE DO 5733	CP 03-30-05	L.F.	
F	SEE DO 5803	CP 06-21-05	L.F.	
G	SEE DO 6556	CP 10-26-07	A.J.	

### DIGITAL DVI - MALE TO MALE SINGLE LINK

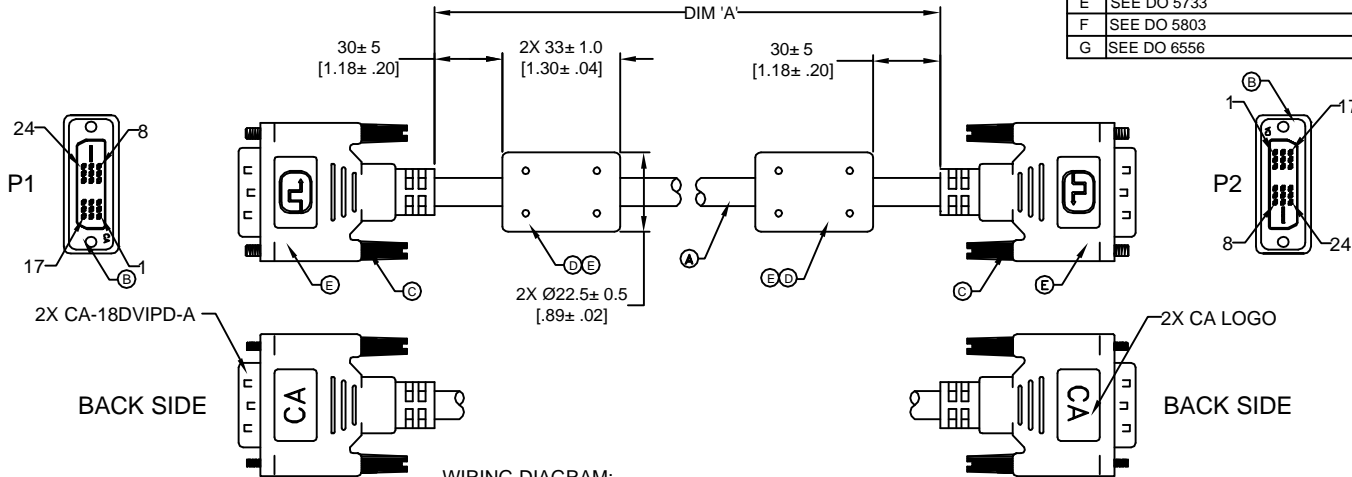

#### WIRING DIAGRAM:

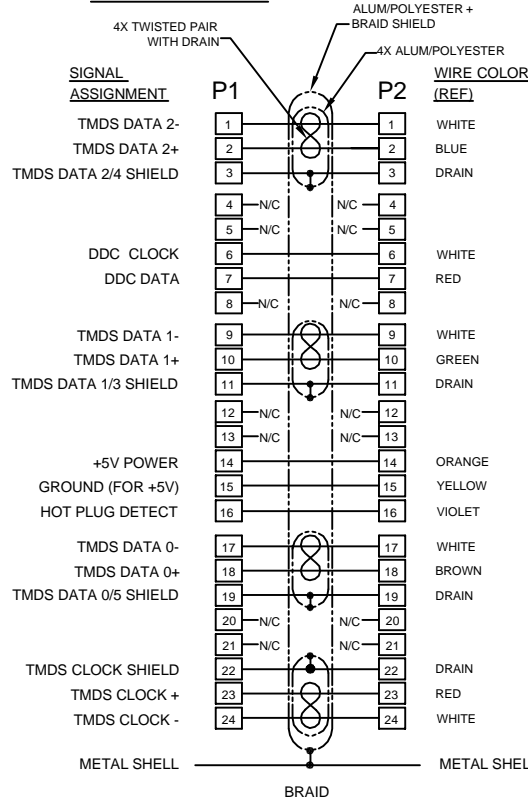

#### ORDERING NOMENCLATURE :

### U702001-02.0

DIM 'A' (IN METERS) 1  
02.0 = STANDARD

#### TOLERANCE TABLE:

CABLE LENGTH	TOLERANCE (IN METERS)
.1M - .9M	±.013M
1M - 2.9M	±.025M
3M OR GREATER	±.05M

1 CONSULT FACTORY FOR ADDITIONAL COLORS, CABLE LENGTHS AND CONSTRUCTION OPTIONS.

NOTES : UNLESS OTHERWISE SPECIFIED

#### LIST OF MATERIALS :

ITEM	DESCRIPTION	QTY
E	BOOT PVC 45P, COLOR: WHITE	A/R
D	CORE (OD)17.5*(L)28.5*(ID)9.5mm	2
C	THUMBSCREW Ø2.8*32mm ABS COLOR: WHITE	4
B	DVI(18+1) M CONNECTOR G/F(CA-18DVIPD-A*2)	2
A	UL 20276 (#28*4P(AE))+#28*1P+#28*3C+AB O.D=7.3mm JACKET COLOR: WHITE	1

DIMENSIONS ARE IN MM TOLERANCES ARE:		APPROVALS		DATE	<b>CIRCUIT ASSEMBLY CORP.</b> 18 THOMAS ST., IRVINE, CALIFORNIA 92618-2777	
DECIMALS ANGLES X ±.25 °3'		DRAWN <b>J. LANG</b>		4-28-00		
TOLERANCES ARE:		CHECKED <b>A. JOCHEN</b>		5-1-00	<b>CABLE ASSEMBLY</b> <b>DIGITAL DVI MALE TO MALE - SINGLE LINK</b> <b>CA-D18DVIPD-A</b>	
DIMENSIONS IN BRACKETS (X.XX) ARE INCHES TOLERANCES ARE:		THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF CIRCUIT ASSEMBLY CORPORATION. CIRCUIT ASSEMBLY CORPORATION RESERVES ALL PATENT, PROPRIETARY, DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS HERETO, AND TO ANY ARTICLE DISCLOSED HEREIN EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY RIGHTS.		SIZE		CODE IDENT NO.
DECIMALS ANGLES XX ±.010 °3'		DO NOT SCALE DRAWING		C		52072
				DRAWING NO. <b>U702001</b>		
				REV. <b>G</b>		
				SCALE: 1 : 1		
				SHEET 1 OF 1		