



PART NO. CA-U702004-02.0

REVISIONS				
LTR	DESCRIPTION	DATE	APPROVED	
A	INITIAL RELEASE SEE DO 4004	JL 06-26-00	A.J.	
B	SEE DO 4698	JL 11-29-01	A.J.	
C	SEE DO 4749	CP 02-01-02	A.J.	
D	SEE DO 5646	CP 11-17-04	L.F.	
E	SEE DO 5733	CP 03-30-05	L.F.	
F	SEE DO 5803	CP 06-21-05	L.F.	
G	SEE DO 6171	CP 08-10-06	I.M.	

DIGITAL DVI MALE TO MALE - DUAL LINK

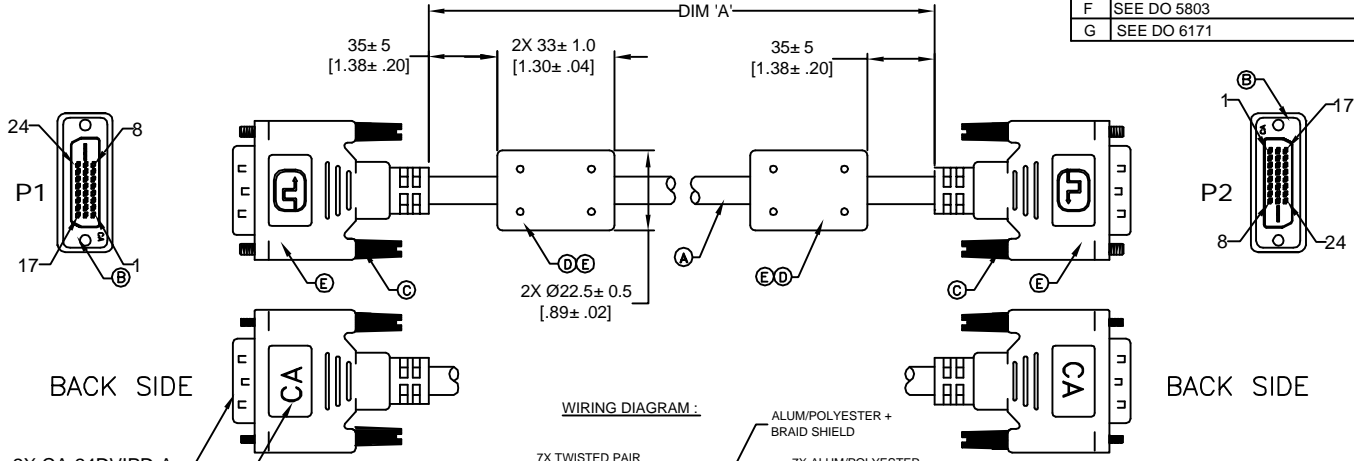

WIRING DIAGRAM :

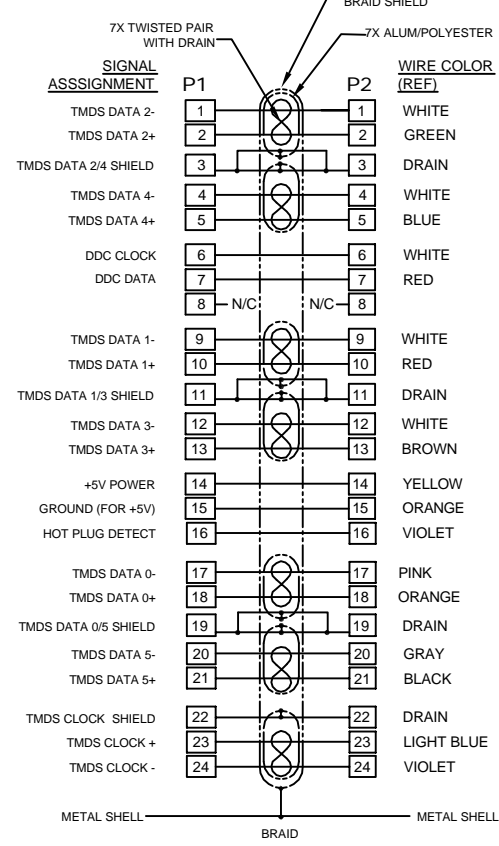

ORDERING NOMENCLATURE :

U702004-02.0

DIM 'A' (IN METERS) ①
02.0 = STANDARD

TOLERANCE TABLE:

CABLE LENGTH	TOLERANCE (IN METERS)
.1M - .9M	±.013M
1M - 2.9M	±.025M
3M OR GREATER	±.05M

2. MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT. (ROHS)

① CONSULT FACTORY FOR ADDITIONAL COLORS, CABLE LENGTHS AND CONSTRUCTION OPTIONS.

NOTES : UNLESS OTHERWISE SPECIFIED

LIST OF MATERIALS :

ITEM	DESCRIPTION	QTY
E	BOOT PVC 45P COLOR: WHITE	A/R
D	CORE (OD)17.5"(L)28.5"(ID)9.5mm	2
C	THUMBSCREW Ø2.8*32.0mm #4-40UNC ABS COLOR: WHITE	4
B	DVI 24+1 MALE CONNECTOR G/F(CA-24DVI DP-A*2)	2
A	UL 20276 [(#28"2C+AE)7PCS+28"1P+28"3C]+AB	1
	O.D=8.6mm JACKET COLOR: WHITE	

DIMENSIONS ARE IN MM		APPROVALS		DATE
TOLERANCES ARE:		DRAWN	J. LANG	6-26-00
DECIMALS	ANGLES	CHECKED	A. JOCHEN	6-26-00
.XX ± .25	° ±3°	THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF CIRCUIT ASSEMBLY CORPORATION. CIRCUIT ASSEMBLY CORPORATION RESERVES ALL PATENT, PROPRIETARY, DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREON, AND TO ANY ARTICLE DISCLOSED HEREIN. RECEIPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY RIGHTS.		
DIMENSIONS IN BRACKETS [XXX] ARE INCHES		DO NOT SCALE DRAWING		
DECIMALS	ANGLES	SCALE: 1 : 1		
.XX ± .010	° ±3°	SHEET 1 OF 1		
XXX ± .006				

CIRCUIT ASSEMBLY CORP.
18 THOMAS ST., IRVINE, CALIFORNIA 92618-2777

CABLE ASSEMBLY
DIGITAL DVI MALE TO MALE, DUAL LINK
CA-D24DVI DP-A "ROHS COMPLIANT"

SIZE: **C** CODE IDENT NO. 52072 DRAWING NO. **U702004** REV. **G**