



SERIAL ATA DEVICE PLUG THROUGH HOLE, SMT

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -40°C to +85°C

MECHANICAL

Insulator Material: High-temperature thermoplastic, UL94V-0

Contact Material: Copper Alloy




Contact Plating: See options below

ELECTRICAL

Current Rating: 1 AMP

CA-22SAPP- PLATING - MOUNTING

PLATING	MOUNTING
A = gold flash	0 = surface mount
C = 15μ IN gold	1 = thru hole
D = 5μ IN gold	
F = 30μ IN gold	

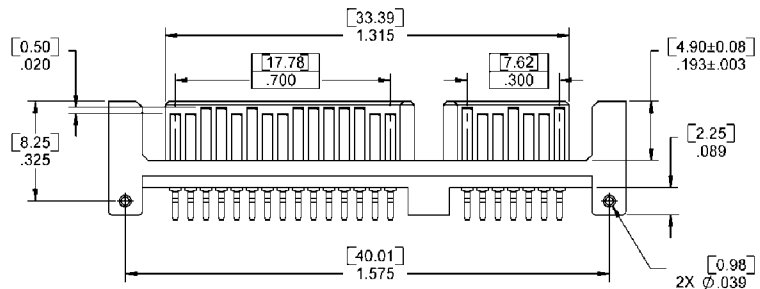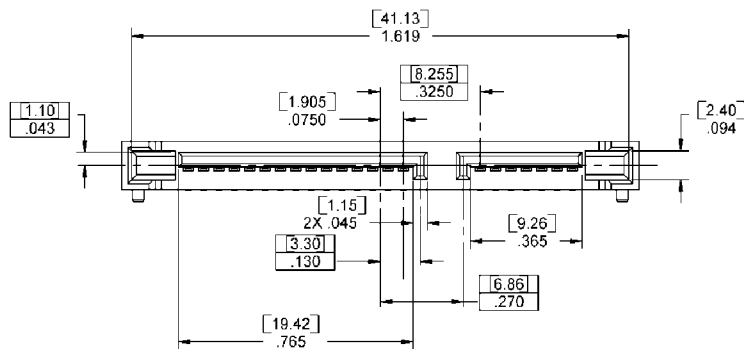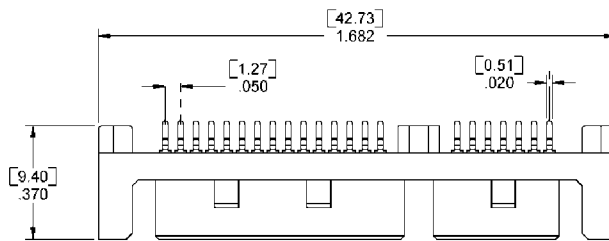

Mating Product: SAHS (pages 26-29)

Drawing Number: CA-620461



For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298