

**CA-68MT-PVC-SPAN**

SPAN LENGTH
Blank = 9.84" [250mm]
125 = 4.92" [125mm]

**.025" MICRO QUICK-TWIST  
PVC CABLE  
IDT FLAT RIBBON CABLE**

**SPECIFICATIONS**

Temperature Rating: +105°C

**MECHANICAL**

Insulation: PVC

Conductor: 30 AWG, 7/38 stranded, tinned copper wire

Span Length: Center of flat section to center of flat section  
See option below

**ELECTRICAL**

Voltage Rating: 30V - UL


UL Style No.: 20528

250mm Impedance: 90 ohms, single ended

117 ohms, differential

125mm Impedance: 85 ohms, single ended

113 ohms, differential

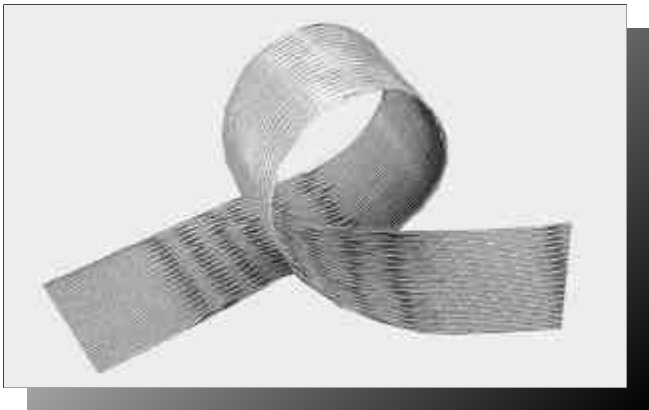

**CA-68MT-PVC-32-SPAN**

SPAN LENGTH
Blank = 9.84" [250mm]
125 = 4.92" [125mm]

**.025" SUB-MICRO QUICK-TWIST  
PVC CABLE  
IDT FLAT RIBBON CABLE**

**SPECIFICATIONS**

Temperature Rating: +105°C

**MECHANICAL**

Insulation: PVC

Conductor: 32 AWG, 7/40 stranded, tinned copper wire

Span Length: Center of flat section to center of flat section  
See option below

**ELECTRICAL**

Voltage Rating: 30V - UL

UL Style No.: 20528

250mm Impedance: 130 ohms, single ended

105 ohms, differential

125mm Impedance: 132 ohms, single ended

95 ohms, differential