



**.025" LAMINATED MICRO QUICK-TWIST  
PVC CABLE  
IDT FLAT RIBBON CABLE**

**SPECIFICATIONS**

Temperature Rating: +105°C

***MECHANICAL***

Insulation: PVC

Conductor: 30 AWG, 7/38 stranded, tinned copper wire

Span Length: Center of flat section to center of flat section  
See option below

***ELECTRICAL***

Voltage Rating: 30V - UL

UL Style No.: 20528 VW-1

250mm Impedance: 115 ohms, single ended

85 ohms, differential

125mm Impedance: 112 ohms, single ended


82 ohms, differential

CA-68MTS-PVC- SPAN

**SPAN LENGTH**

Blank = 9.84" [250mm]

125 = 4.92" [125mm]

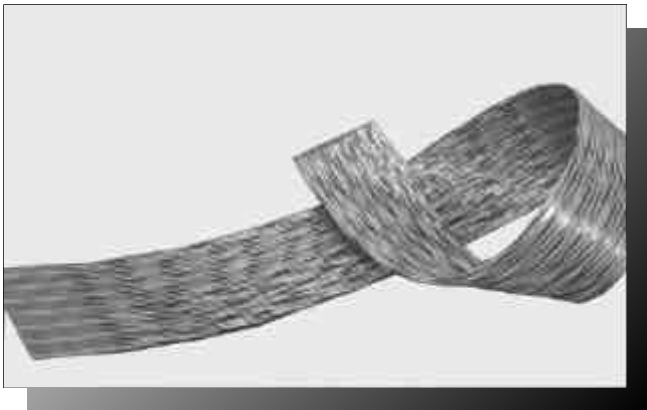

**.025" LAMINATED SUB-MICRO  
QUICK-TWIST PVC CABLE  
IDT FLAT RIBBON CABLE**

**SPECIFICATIONS**

Temperature Rating: +105°C

***MECHANICAL***

Insulation: PVC

Conductor: 32 AWG, 7/38 stranded, tinned copper wire

Span Length: Center of flat section to center of flat section  
See option below

***ELECTRICAL***

Voltage Rating: 30V - UL

UL Style No.: 20528

Impedance: 95 ohms, single ended

130 ohms, differential

CA-68MTS-PVC-32