

Pitch: .100"

MODULAR, .025" SQUARE SYSTEM, DUAL ROW BOARD STACKING HEADER

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled thermoplastic, black, UL94V-0

Contact Material: Copper Alloy

Contact Plating: Gold Flash

ELECTRICAL

Current Rating: 1 AMP


Consult factory for additional options

CA-C20- POSITION - POST A- STACK - DIM C

POSITION = 04 - 80
POST = Dim A (post extension)
STACK = Dim B (overall stacking height)

Customer to determine A & B dimensions to meet their specifications.

DIMENSION C (overall pin length)
.440
.530
.630
.730
.830
.930
1.030
1.130
1.230
1.400
1.500

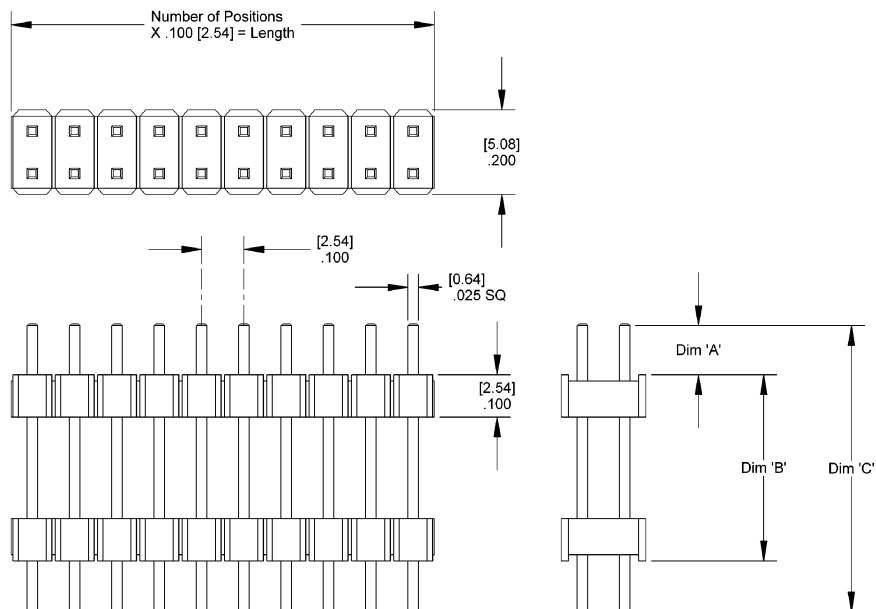

Mating Product: VSC (page 117), VSCR (page 119), PCB
Drawing Number: CA-620399



For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298