

Pitch: .100"

# MODULAR, SCREW MACHINE SYSTEM, STRIP SOCKET

## SPECIFICATIONS

### ENVIRONMENTAL

Temperature Range: -55°C to +125°C

### MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Beryllium Copper

Sleeve Material: Brass

Contact Plating: 15µ IN gold


### ELECTRICAL

Current Rating: 1 AMP

Consult factory for additional options

CA- SERIES POSITION MS-1C

SERIES	POSITION
S = Single Row	Single 01 thru 36
D = Dual Row	Dual 04 thru 72

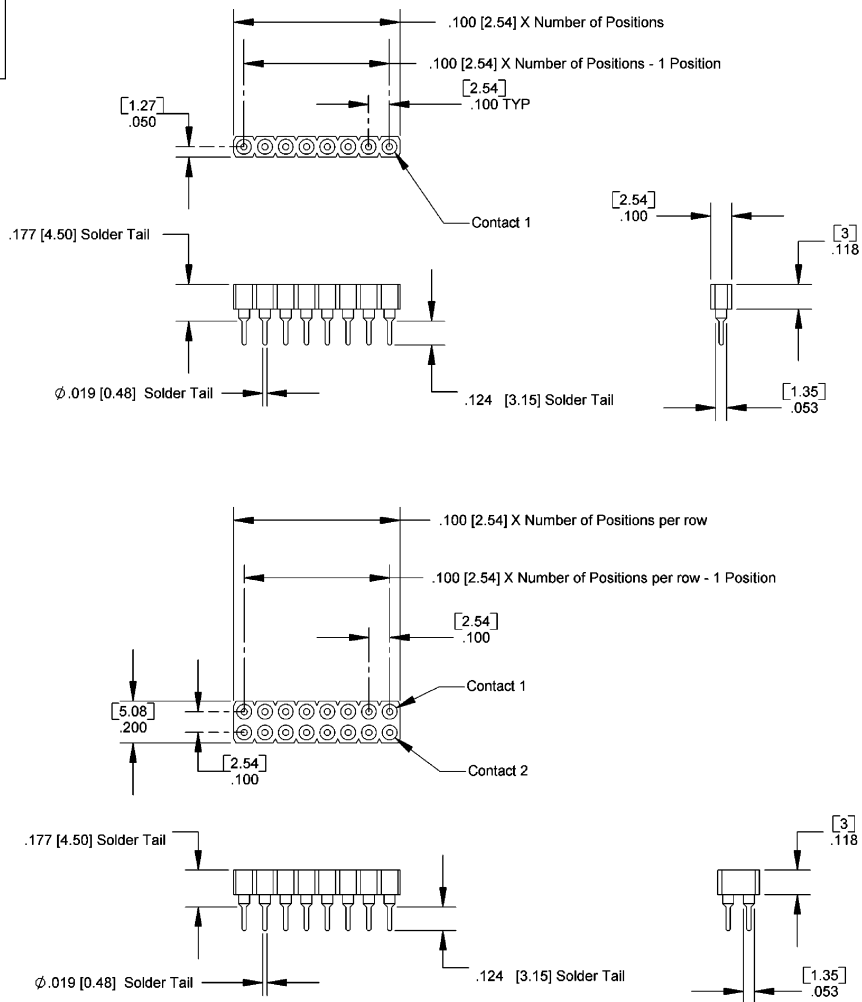

Mating Product: MP (page 120)  
Drawing Number: CA-610250

For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298