

Pitch: .050" x .075"

INSULATION DISPLACEMENT TRANSITION BOARD CONNECTOR

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled polyester, blue, UL94V-0

Contact Material: Phosphor Bronze

Contact Plating: Tin

Terminates To: .025" cable, 30 AWG

ELECTRICAL




Current Rating: 0.5 AMP

Consult factory for additional options

CA-POSITION NFT2-1T



POSITION		
50	68	

DIMENSIONS		
Position	A	B
50	1.436 [36.48]	1.200 [30.48]
68	1.886 [47.90]	1.650 [41.91]

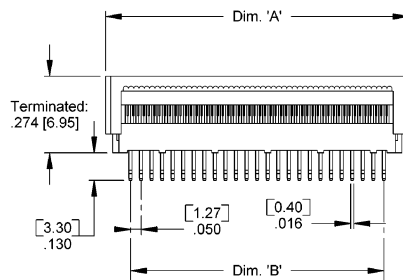

Patented 4 Point/3 Blade

CA-50NFT2-1T shown

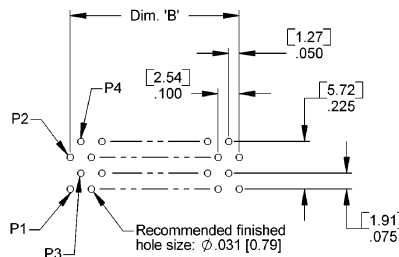

Recommended PCB Layout
(Component Side)

Mating Product: PCB Mount
Drawing Number: CA-620353



For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298