



Pitch: .0492"

.049" CENTER PLUG PCI/LAN-MODEM, SURFACE MOUNT

SPECIFICATIONS

Meets: Mini PCI specifications for Type I and Type III
Lan and Modem I/O connectors

ENVIRONMENTAL

Temperature Range: -40°C to +85°C

MECHANICAL

Insulator Material: High-temp thermoplastic, natural, UL94V-0

Contact Material: Phosphor Bronze

Solder Tab Material: Copper Alloy

Contact Plating: See options below

ELECTRICAL



Current Rating: 1 AMP/contact

Consult factory for additional options

CA- POSITION PCPR-S PLATING

POSITION	PLATING
02 20	A = gold flash
04 24	B = 10µ IN gold
14	C = 15µ IN gold

DIMENSIONS				
Position	A	B	C	D
02	.049 [1.25]	.148 [3.77]	.301 [7.65]	n/a
04	.148 [3.75]	.247 [6.27]	.400 [10.15]	.098 [2.50]
14	.640 [16.25]	.739 [18.77]	.892 [22.65]	.591 [15.0]
20	.935 [23.75]	1.034 [26.27]	1.187 [30.15]	.886 [22.50]
24	1.132 [28.75]	1.231 [31.27]	1.384 [35.15]	1.083 [27.50]

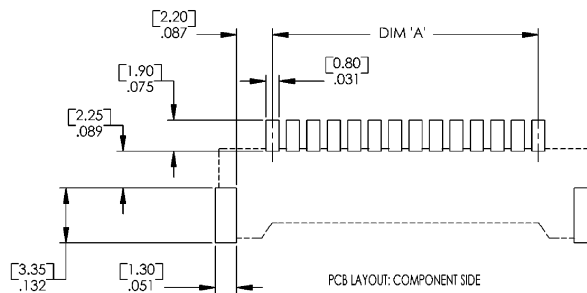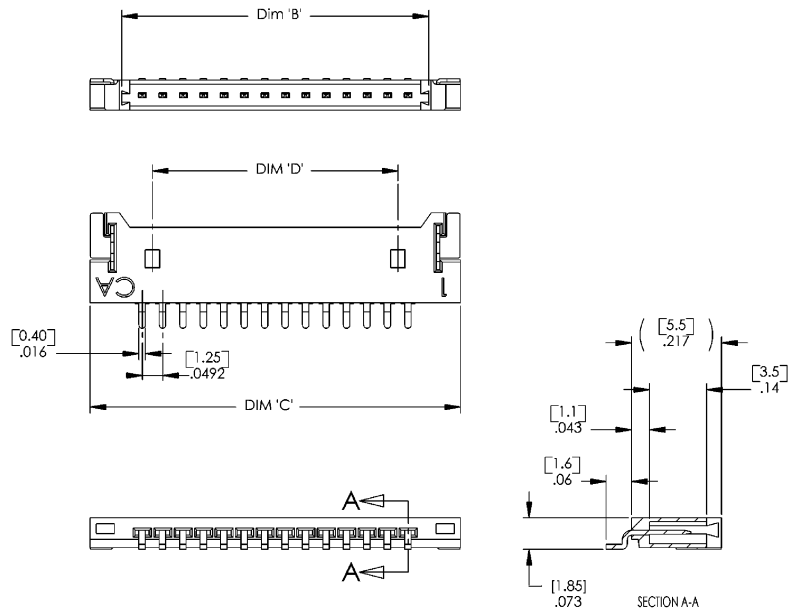

Drawing Number: CA-620395

For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298