

MODULAR, .025" SQUARE SYSTEM STRIP HEADER, VALUE LINE

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Copper Alloy

Contact Plating: Gold Flash


ELECTRICAL

Current Rating: 1 AMP

Consult factory for additional pin length options

CA- SERIES POSITION -24A-46

| SERIES | POSITION |
|----------------|--------------------|
| S = Single Row | Single 01 thru 40 |
| D = Dual Row | Dual 04 thru 80 |
| T = Triple Row | Triple 09 thru 120 |

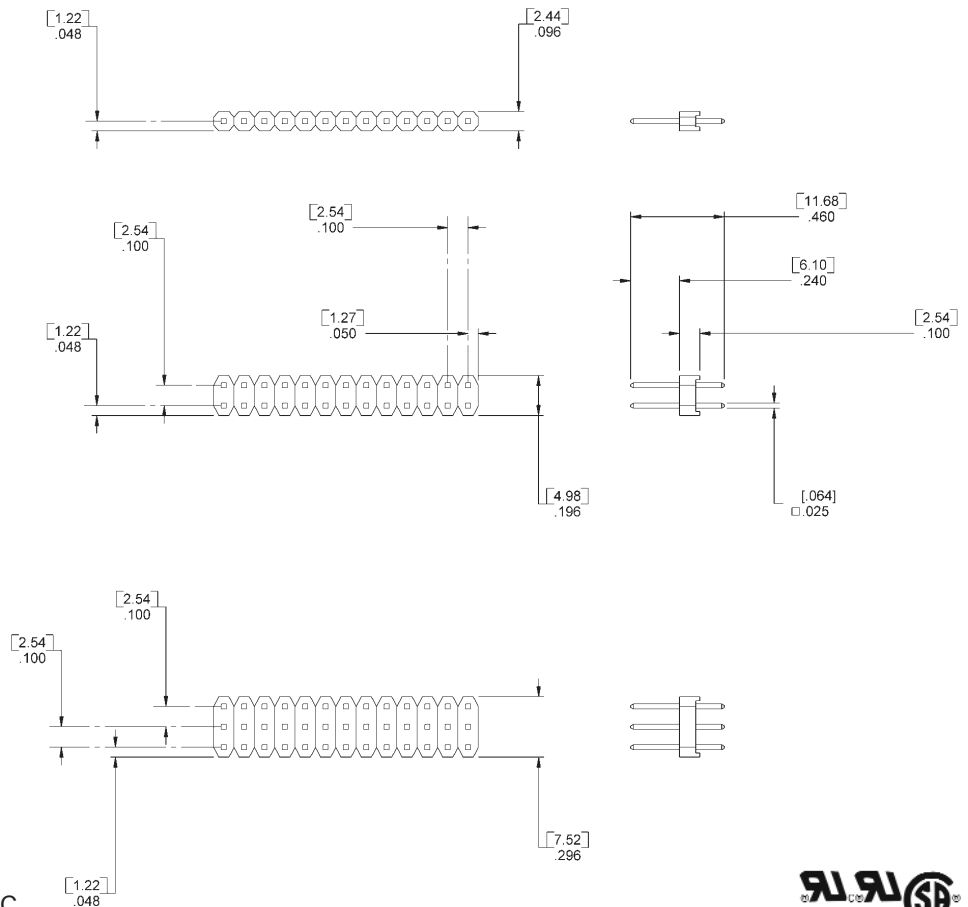

Mating Product: IDS2, FID, SJ, VSC
 Drawing Number CA-620390



For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298

Circuit Assembly Asia Hqtrs. 2F, No. 10 Lane 24, Ho Ping Rd., Pan Chiao City, Taipei Hsien, Taiwan Tel +886 2-2951-9916 Fax +886 2-2954-9126