


PART NO.	CA-XXIDC-G
----------	------------

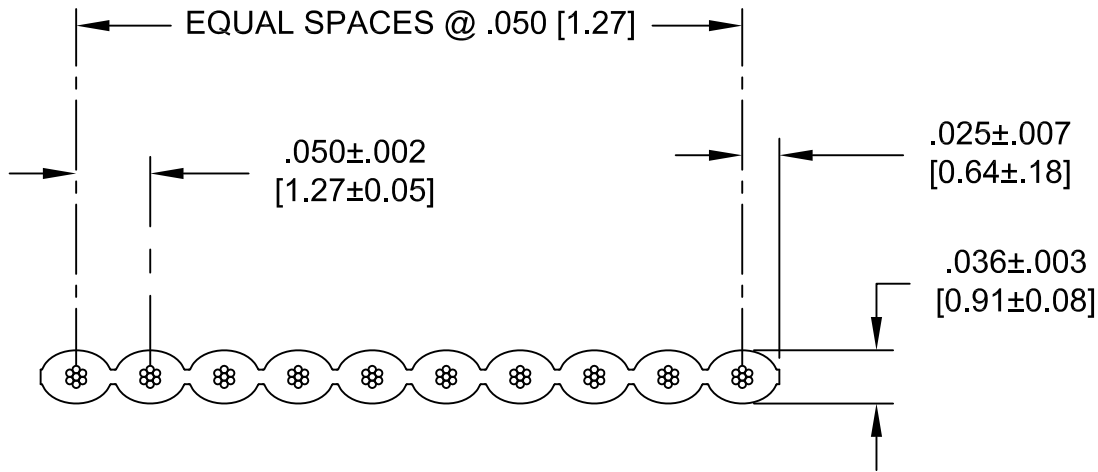

ORDERING NOMENCLATURE :

CA - XX IDC - G

NO OF CONDUCTORS

06, 09, 10, 12, 14, 15, 16, 20, 24, 25, 26, 30, 34, 36, 37, 40, 50, 60, 64, 72

INSULATION DISPLACEMENT CABLE

GRAY PVC LAMINATE

2. SPECIFICATIONS :

ENVIRONMENTAL :

TEMPERATURE RATING : +105°C

MECHANICAL :

INSULATION : PVC, GRAY

CONDUCTOR : 28 AWG, 7/36 STRANDED, TINNED COPPER WIRE

ELECTRICAL :

VOLTAGE RATING : 300V - UL, 300V - CSA

UL STYLE NO. : 2651

CSA TYLE NO. : AWM 1 A/B FT-1

IMPEDANCE : 105W, SINGLE ENDED

145W, DIFFERENTIAL

1. MEETS THE REQUIREMENTS OF THE EUROPEAN PARLIAMENT AND THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (RoHS) .

NOTES : UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES, TOLERANCES ARE :	APPROVALS		DATE	CA CIRCUIT ASSEMBLY CORP. 6 AUTRY SUITE 150, IRVINE, CALIFORNIA 92618
	DRAWN	CUONG P.	9-01-05	
FRACTIONS ±	DECIMALS .X ± .XX±	ANGLES ±	CHECKED	CABLE - IDC SERIES CA-XXIDC-G, 28AWG, .050" PVC, IDT FLAT RIBBON GRAY, "RoHS"
			LEROY FONG 9-01-05	
THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF CIRCUIT ASSEMBLY CORPORATION. CIRCUIT ASSEMBLY CORPORATION RESERVES ALL PATENT, PROPRIETARY, DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERETO, AND TO ANY ARTICLE DISCLOSED HEREIN EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FORGOING DOES NOT APPLY TO VENDOR PROPRIETARY RIGHTS.	REV	DESC.	DATE	INIT.
	A	DO 5862	9-01-05	L.F.
	B	DO 7616	5-24-21	T.L.
	C	DO 7634	10-06-21	T.L.
	SIZE	CODE IDENT NO.	DRAWING NO.	REV.
	A	52072	595002	C
	SCALE: 8 : 1	DO NOT SCALE DRAWING	SHEET 1 OF 1	