

4


3

2

1

PART NO. CA-SXXSTL-XX-XX-X-X

REVISIONS				
LTR	DESCRIPTION	DATE	APPROVED	
A	RELEASE TO PRODUCTION			
B	SEE ECO 173	MDR 2/24/81	J.McA.	
C	SEE ECO 516	MDR 11/1/83	J.McA.	
D	SEE ECO 621	MDR 5/18/84	J.McA.	
E	SEE DO 6878	C.P. 8/28/09	A.J.	
F	SEE DO 7054	C.P. 01/19/11	I.M.	
G	SEE DO 7284	C.P. 08/19/14	I.M.	
H	SEE DO 7551	C.P. 02/14/20	T.L.	
J	SEE DO 7626	C.P. 08/23/21	T.L.	

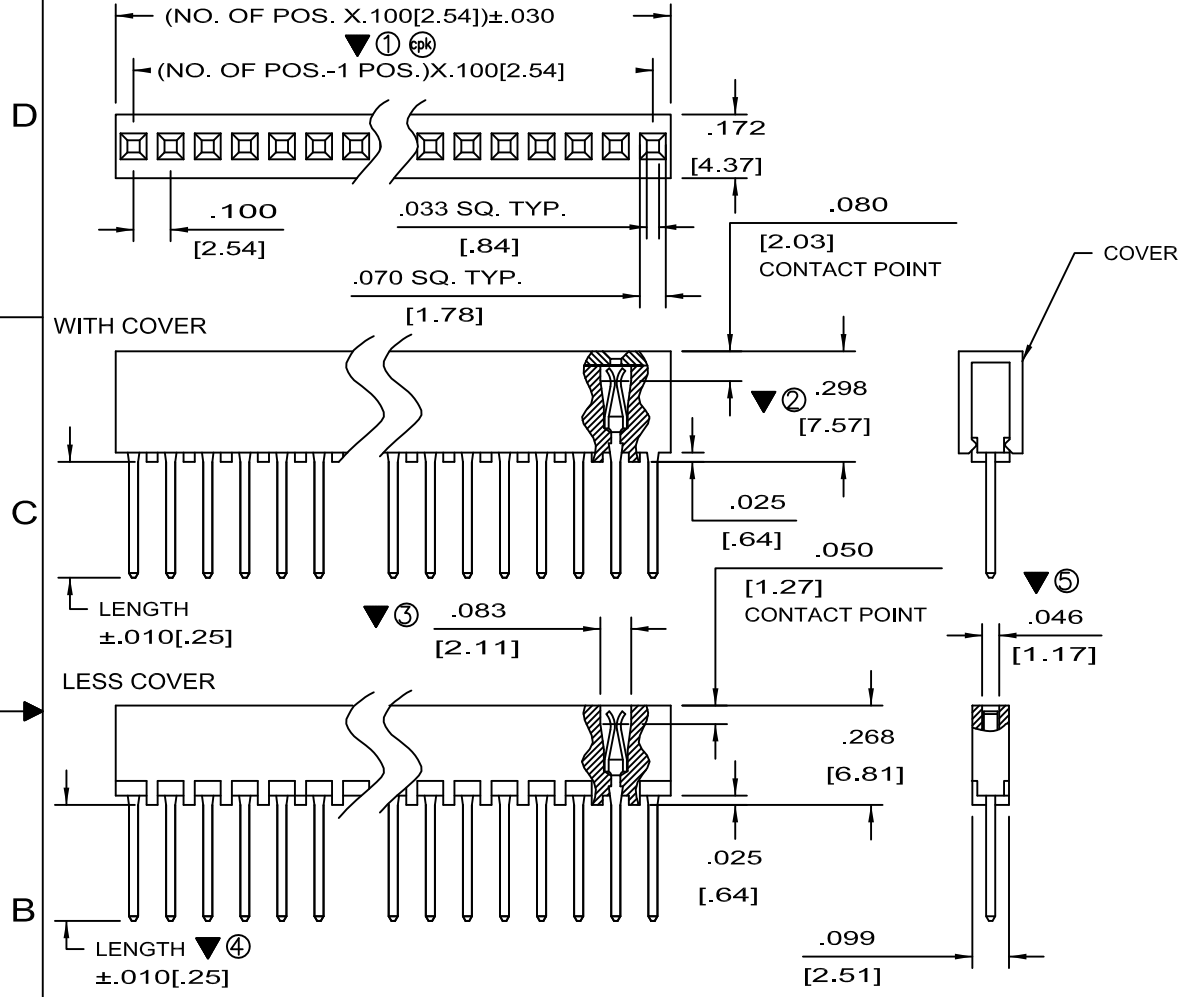

### CA-S XX STL-XX-XX-X-X

SINGLE ROW \_\_\_\_\_  
 NO. OF CONTACT \_\_\_\_\_  
 2 - 25 POSITIONS \_\_\_\_\_  
 SOCKET THIN LINE \_\_\_\_\_  
 PLATING: \_\_\_\_\_  
 -10 = .000010[0.00025] GOLD OVER  
 .000075[0.002] NICKEL  
 -T = .000250[0.0063] BRIGHT TIN OVER  
 .000075[0.002] COPPER  
 CONTACT TYPE: \_\_\_\_\_  
 ⑤ SD = SOLDER DIP .123[3.12]LONG X.025[0.63]X.009[0.23]STK  
 1WW = 1 WIRE WRAP .303[7.69]LONG X.025[0.63]SQ.  
 2WW = 2 WIRE WRAP .408[10.36]LONG X.025[0.63]SQ.  
 3WW = 3 WIRE WRAP .625[15.87]LONG X.025[0.63]SQ.  
 CONTACT MATERIAL: \_\_\_\_\_  
 BLANK = PHOSPHOR BRONZE, GRADE A, SPRING TEMPER, STD.  
 -BC = BERYLIUM COPPER, HEAT TREATED, OPTION.  
 (SOLDER DIP CONTACT ONLY)  
 COVER: OPTIONAL \_\_\_\_\_  
 BLANK = WITH COVER  
 -LC = LESS COVER

7. MARK "▼" DIMENSION MUST BE CONTROLLED.  
 MARK "⊗" IS DIMENSION NO.  
 MARK "cpk" MUST BE CONTROLLED BY CPK.

6. MEETS THE REQUIREMENTS OF THE EUROPEAN PARLIAMENT AND THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT. (ROHS)

⑤ ONLY AVAILABLE WITH COVER.

4. CA-SXXSTL-10-2WW SHOWN FOR ILLUSTRATION ONLY.

3. MAXIMUM INSERTION DEPTH FOR MATING PIN:  
 -.198[5.03] WITH COVER.  
 -.168[4.27] LESS COVER.

2. CONTACT MATERIAL: SEE ORDERING NOMENCLATURE

1. INSULATOR MATERIAL: CLASS FILLED POLYESTER. BLACK, UL 94V-0.

NOTES: UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES TOLERANCES ARE:		APPROVALS	DATE	<b>CIRCUIT ASSEMBLY CORP.</b> 6 AUTRY SUITE 150, IRVINE, CALIFORNIA 92618 <b>CONNECTOR ASSEMBLY-SSTL SERIES</b> <b>SINGLE ROW .100[2.54] CENTERS,</b> <b>"RoHS"</b>
DECIMALS	ANGLES	DRAWN <b>M. D. ROA</b>	8/19/79	
.XX ± .010	± 3°	CHECKED <b>M.SHEALY</b>	10/24/79	SIZE CODE IDENT NO. DRAWING NO. REV. <b>C 52072 610004 J</b>
DIMENSIONS IN BRACKETS [XXX] ARE IN MILLIMETERS TOLERANCES ARE:		THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF CIRCUIT ASSEMBLY CORPORATION. CIRCUIT ASSEMBLY CORPORATION RESERVES ALL PATENT, PROPRIETARY, DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERE TO, AND TO ANY ARTICLE DISCLOSED HEREIN, EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY RIGHTS.		SCALE: <b>4:1</b> SHEET 1 OF 1

4

3

2

1

A

A

D

D

C

C

B

B