
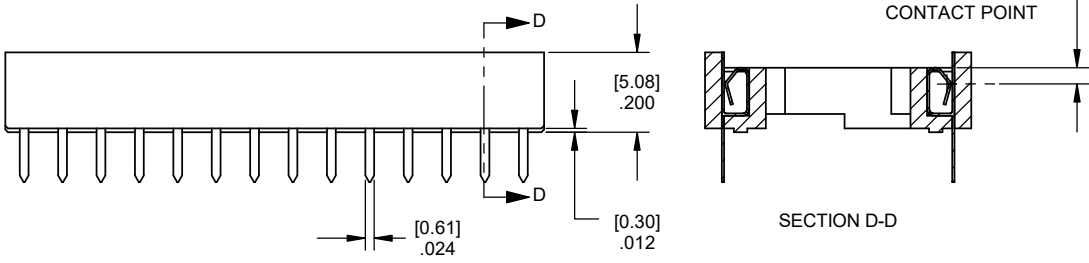
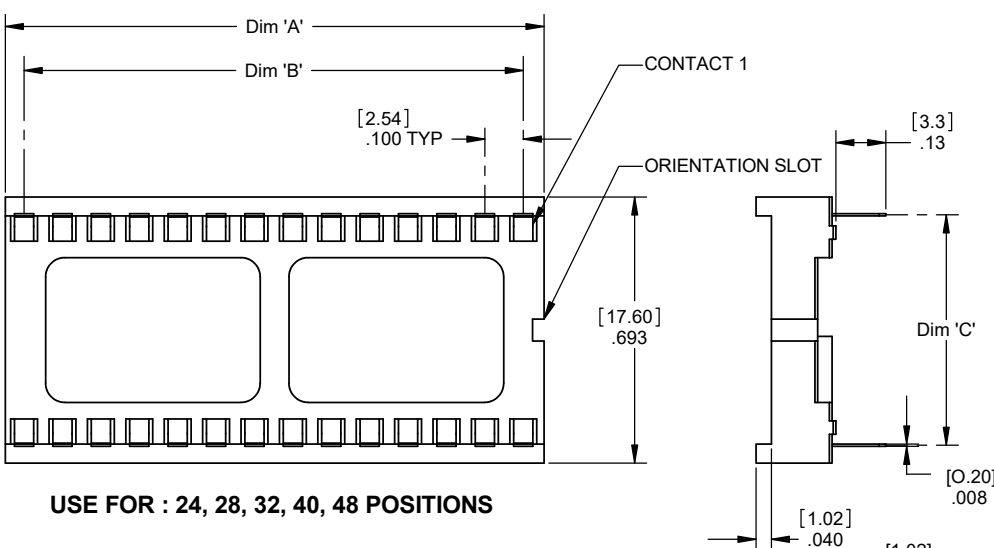


PART NO. CA-XXSDL-1T1-X

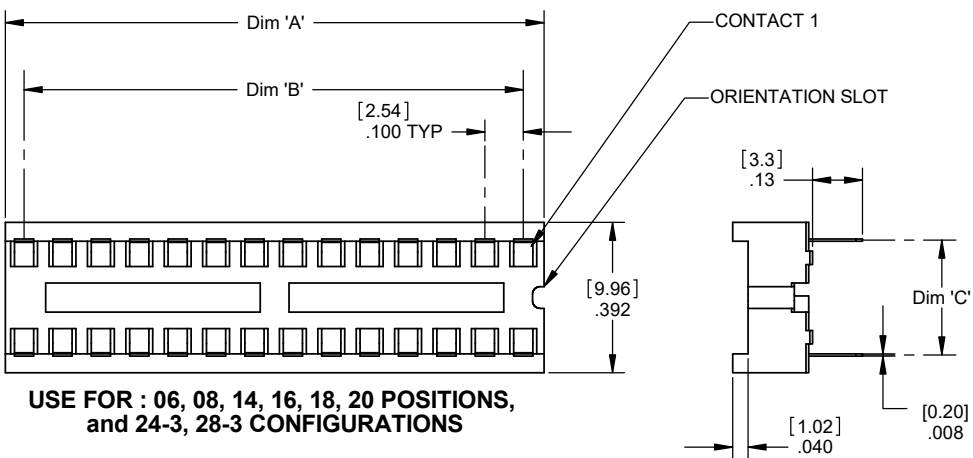

REVISIONS				
LTR	DESCRIPTION	DATE	APPROVED	
A	INITIAL RELEASE SEE DO 5898	CP 10-11-05	L.F.	
B	SEE DO 7521	CP 04-19-19	T.L.	
C	SEE DO 7607	CP 03-22-21	T.L.	

CA-XX SDL-1 T1-X

NUMBER OF POSITIONS \_\_\_\_\_

SOCKET, DUAL LEAF \_\_\_\_\_

TAIL TYPE \_\_\_\_\_

1 = SOLDER TAIL, STRAIGHT

PLATING \_\_\_\_\_

T1 = .000100 [.00254] TIN PLATE OVERALL  
.000040 [.00100] NICKEL UNDERPLATE

ADD IF REQUIRED \_\_\_\_\_

-3 = .300 [7.62] BETWEEN ROWS  
(24 & 28 POSITION ONLY)

**TABULATION:**

Positions	A		B		C	
	IN	MM	IN	MM	IN	MM
6	.300	7.62	.200	5.08	.300	7.62
8	.400	10.16	.300	7.62	.300	7.62
14	.700	17.78	.600	15.24	.300	7.62
16	.800	20.32	.700	17.78	.300	7.62
18	.900	22.86	.800	20.32	.300	7.62
20	1.000	25.40	.900	22.86	.300	7.62
24-3	1.200	30.48	1.100	27.94	.300	7.62
24	1.200	30.48	1.100	27.94	.600	15.24
28-3	1.400	35.56	1.300	33.02	.300	7.62
28	1.400	35.56	1.300	33.02	.600	15.24
32	1.600	40.64	1.500	38.10	.600	15.24
40	2.000	50.80	1.900	48.26	.600	15.24
48	2.400	60.96	2.300	58.42	.600	15.24

3. MATERIAL :  
INSULATOR: POLYESTER, UL94V-0, BLACK  
CONTACT: PHOSPHOR BRONZE

2. SPECIFICATIONS  
VOLTAGE RATING: 250V AC  
CURRENT RATING: 1 AMP  
CONTACT RESISTANCE: 30 MILLIOHMS MAX.  
INSULATION RESISTANCE: 5000 MEGOHMS  
WITHSTANDING VOLTAGE: 1000V  
TEMPERATURE RANGE: -25°C TO +85°C

1. MEETS THE REQUIREMENTS OF THE EUROPEAN PARLIAMENT AND THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT. (RoHS)

NOTES : UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES TOLERANCES ARE: DECIMALS ANGLES .XX ±.010 .XXX ±.005	APPROVALS	DATE	<b>CIRCUIT ASSEMBLY CORP.</b> 6 AUTRY SUITE 150, IRVINE, CALIFORNIA 92618 <b>CONNECTOR ASSEMBLY- SDL SERIES CAXXSDL-1T1-X "RoHS"</b>	SIZE C	CODE IDENT NO. 52072	DRAWING NO. <b>610325</b>	REV. C
	DRAWN CUONG PHAM	10-11-05					
DIMENSIONS IN BRACKETS [X.XX] ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ANGLES .X ±.25 .XX ±.12	DO NOT SCALE DRAWING		THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF CIRCUIT ASSEMBLY CORPORATION. CIRCUIT ASSEMBLY CORPORATION RESERVES ALL PATENT, PROPRIETARY, DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERE TO, AND TO ANY ARTICLE DISCLOSED HEREIN EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY RIGHTS.		SCALE: 4:1		SHEET 1 OF 1