


PART NO. CA-22SAPP-X-0

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE SEE DO 5302	C.P. 10-15-03	A.J.
B	SEE DO 5304	C.P. 10-16-03	A.J.
C	SEE DO 5374	C.P. 01-22-04	A.J.
D	SEE DO 5682	C.P. 01-17-05	A.J.
E	SEE DO 7078	C.P. 04-05-11	A.J.
F	SEE DO 7529	C.P. 06-19-19	T.L.
G	SEE DO 7593	C.P. 12-10-20	T.L.

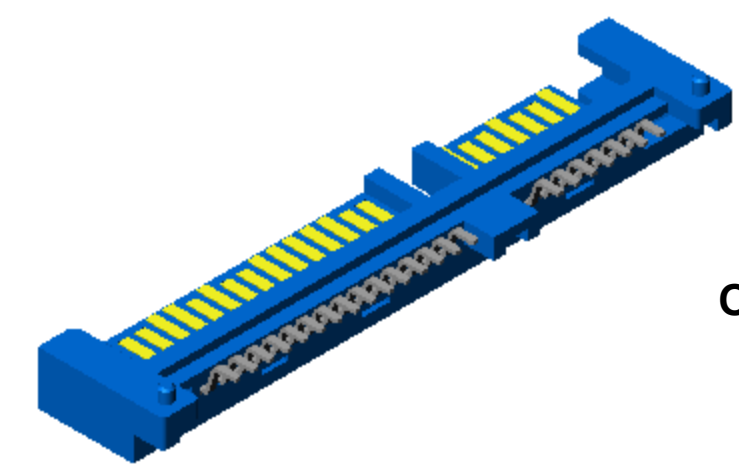

ORDERING NOMENCLATURE :

CA-22SAPP-X-0

NUMBER OF CONTACT POS

SERIAL ATA PERIPHERAL PLUG

PLATING

- A = CONTACT AREA : GOLD FLASH
- C = CONTACT AREA : .000015 [.00038] GOLD
- D = CONTACT AREA : .000005 [.00013] GOLD
- F = CONTACT AREA : .000030 [.00076] GOLD
- ALL WITH :
 SOLDER TAIL AREA : .000150 [.00381] TIN
 UNDERPLATE : .000075 [.00191] NICKEL


MOUNTING STYLE

- 0 = SURFACE MOUNT

2. MEETS THE REQUIREMENTS OF OF THE EUROPEAN PARLIAMENT AND THE RESTRICTION OF THE USE OF CERTAIN HARZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT. (RoHS)

1. INTERPRET DIMENSIONS AND TOLERANCES ASME Y14.5-1994

NOTES : UNLESS OTHERWISE SPECIFIED

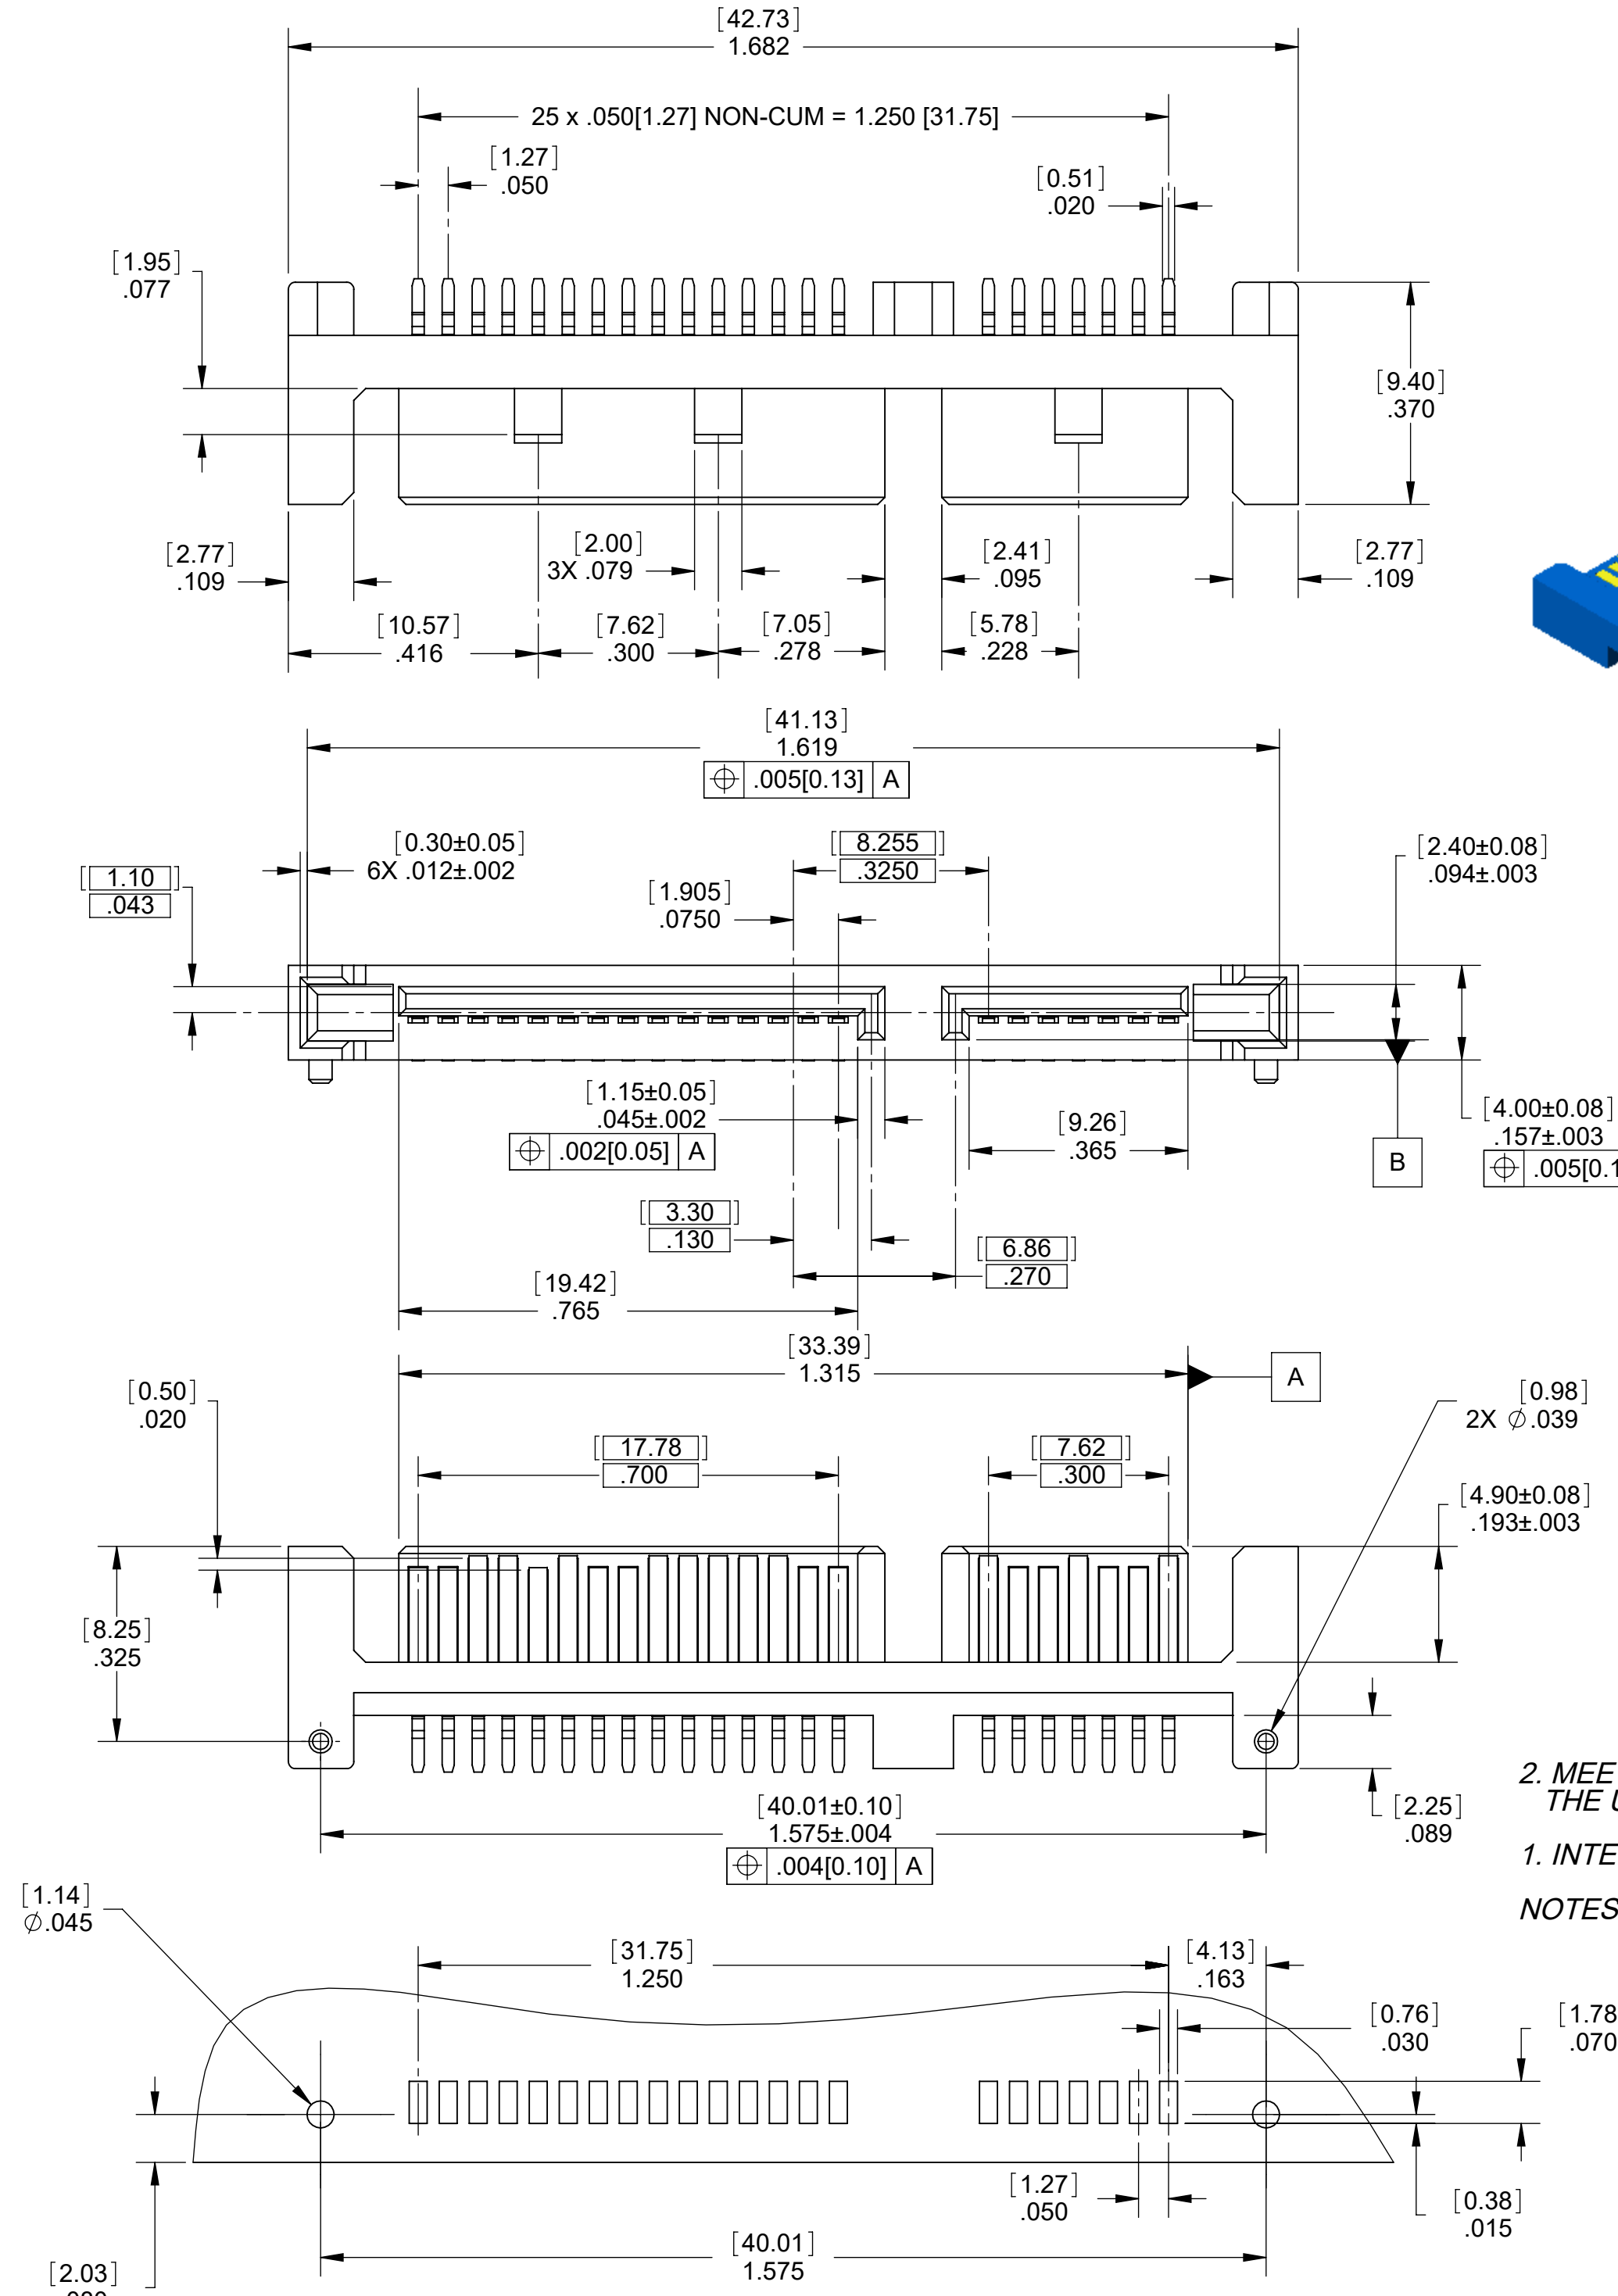

RECOMMENDED PC BOARD LAYOUT

DIMENSIONS ARE IN INCHES TOLERANCES ARE:		APPROVALS	DATE
DECIMALS	ANGLES	DRAWN CUONG.P.	10-15-03
.XX ±.010	±3°	CHECKED A.JOCHEN	10-15-03
.XXX ±.005			
DIMENSIONS IN BRACKETS [X.XX] ARE IN MILLIMETERS TOLERANCES ARE:			
DECIMALS	ANGLES		
.X ±.25	±3°		
.XX .13			
DO NOT SCALE DRAWING			

CA CIRCUIT ASSEMBLY CORP. 6 AUTRY SUITE 150, IRVINE, CALIFORNIA 92618			
CONNECTOR ASSEMBLY-SAPP SERIES SERIAL ATA PERIPHERAL PLUG, SMT "RoHS"			
SIZE	CODE IDENT NO.	DRAWING NO.	REV.
C	52072	620461	G
SCALE: 4:1		SHEET 1 OF 1	