

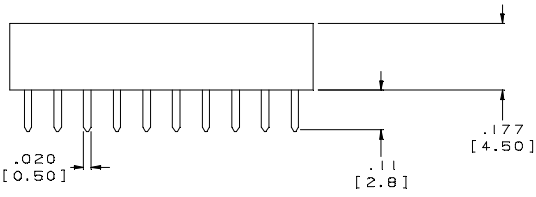
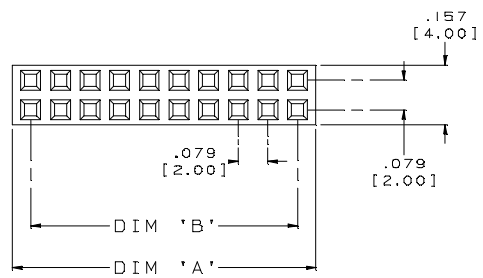

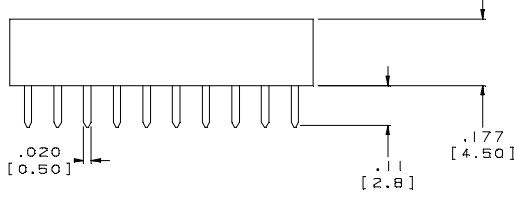


PART NO. CA-XXXXVS-11A

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE SEE DO 3764	JL 11-1-99	A.J.
B	SEE DO 6663	CP 06-3-08	IM

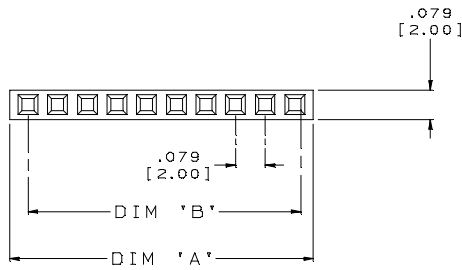

CA-VS-11A

SERIES _____
 SM = SINGLE ROW
 DM = DUAL ROW

POSITION _____
 1 - 40 SINGLE ROW
 4 - 80 DUAL ROW

VERTICAL SOCKET _____

POST EXTENSION _____

PLATING _____

1. SPECIFICATIONS

ENVIRONMENTAL
 TEMP. RANGE : -40°C TO 105°C

MECHANICAL
 INSULATOR MATERIAL : GLASS-FILLED THERMOPLASTIC, BLACK, UL94V-0
 CONTACT MATERIAL : COPPER ALLOY
 CONTACT PLATING : GOLD FLASH

ELECTRICAL
 CURRENT RATING : 1 AMP

2. MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT. (RoHS)

NOTES: UNLESS OTHERWISE SPECIFIED

TABULATION

POSITION	DIM 'A'	DIM 'B'
40 SINGLE ROW	3.14 [80.00]	3.07 [78.00]
80 DUAL ROW	3.14 [80.00]	3.07 [78.00]

DIMENSIONS ARE IN INCHES	APPROVALS	DATE
DECIMALS .XX ± .01 .XXX ± .005	DRAWN J. LANG CHECKED A. JOCHEN	11-1-99

CA CIRCUIT ASSEMBLY CORP.
 18 THOMAS ST., IRVINE, CALIFORNIA 92618-2777

ZMM STRIP LINE
 SOCKET
 "ROHS COMPLIANT"

SIZE C	CODE IDENT NO. 52072	DRAWING NO. 610207	REV. B
--------	----------------------	--------------------	--------

SCALE: 4 : 1 SHEET 1 OF 1

THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF CIRCUIT ASSEMBLY CORPORATION. CIRCUIT ASSEMBLY CORPORATION RESERVES ALL PATENT, PROPRIETARY, RIGHTS IN MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREIN, AND TO ANY ARTICLE DISCLOSED HEREIN EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY RIGHTS.