

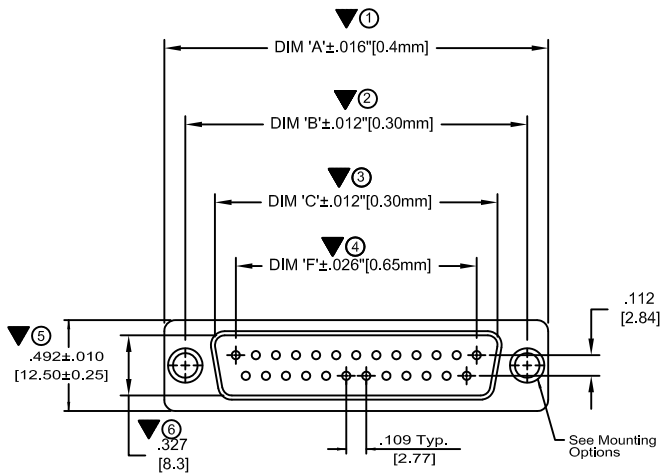



PART NO. CA-XXDPID-X-SR

REVISIONS				
LTR	DESCRIPTION	DATE	APPROVED	
A	INITIAL RELEASE SEE DO 3853	DL 2-2-00	A.J.	
B	SEE DO 4711	CP 12-12-01	A.J.	
C	SEE DO 5403	CP 02-24-04	A.J.	
D	SEE DO 6159	CP 07-27-06	I.M.	
E	SEE DO 7366	CP 07-20-16	I.M.	
F	SEE DO 7438	CP 02-12-18	T.H.	
G	SEE DO 7522	CP 04-25-19	T.L.	

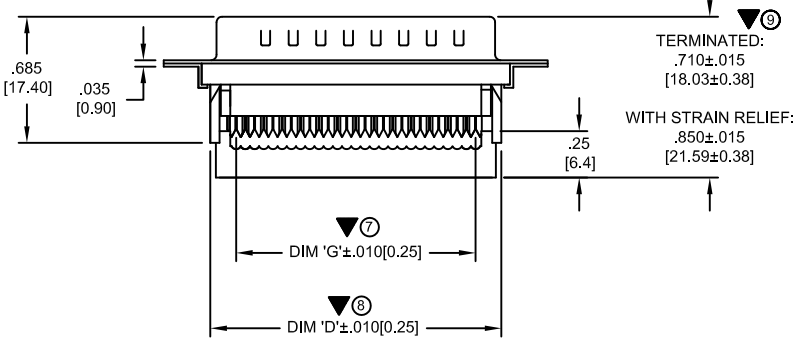


(BLANK) STRAIN RELIEF

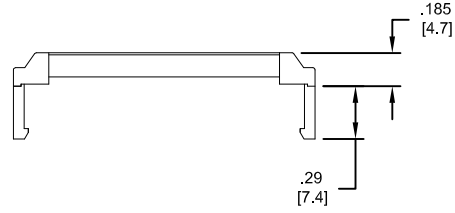

BLANK = ∅.120 [3.05] THRU HOLES

ORDERING NOMENCLATURE:

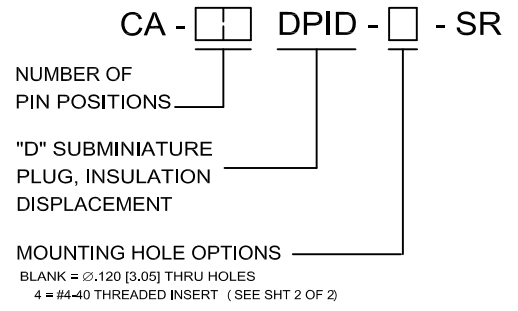





- MARK "▼" DIMENSION MUST BE CONTROLLED
  - MARK "⊗" IS DIMENSION No.
  - MEETS THE REQUIREMENTS OF THE EUROPEAN PARLIAMENT AND THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT. (RoHS)
  - TEMPERATURE RANGE: -40°C TO +105°C
  - PLATING:
    - CONTACT PLATING: MATING AREA: GOLD FLASH UNDERPLATE: NICKEL IDT AREA: TIN
    - SHELL PLATING: TIN
  - LIST OF MATERIALS:
    - INSULATOR MATERIAL: PBT GLASS FIBER, BLACK, UL94V-0
    - SHELL MATERIAL: SPCC
    - CONTACT MATERIAL: BRASS
  - CURRENT RATING: 1AMP
  - TERMINATES TO .050" PITCH. 26AWG OR 28AWG CABLE
- NOTES: UNLESS OTHERWISE SPECIFIED

TABULATION :

NO. OF POSITIONS	DIM. 'A'	DIM. 'B'	DIM. 'C'	DIM. 'D'	DIM. 'F'	DIM. 'G'
9	1.21 [30.8]	.984 [25.00]	.667 [16.95]	.62 [15.7]	.436 [11.08]	.400 [10.16]
15	1.54 [39.2]	1.311 [33.30]	.996 [25.30]	.94 [24.0]	.763 [19.39]	.800 [17.78]
25	2.09 [53.05]	1.854 [47.04]	1.534 [38.96]	1.49 [37.9]	1.309 [33.24]	1.200 [30.48]
37	2.73 [69.4]	2.500 [63.50]	2.182 [55.42]	2.14 [54.5]	1.963 [49.86]	1.800 [45.72]

DIMENSIONS ARE IN INCHES TOLERANCES ARE :	APPROVALS	DATE	<b>CIRCUIT ASSEMBLY CORP.</b> 3A VANDERBILT, IRVINE, CALIFORNIA 92618-2030 <b>CONNECTOR ASSEMBLY - DPID SERIES</b> <b>CA-XXDPID-X-SR</b> <b>"RoHS"</b>
	DRAWN <b>D. LANG</b>	2-2-00	
DECIMALS .XX ±.010 ANGLES ±3° XXX ±.005	CHECKED <b>A. JOCHEN</b>	2-2-00	SIZE <b>C</b>
DIMENSIONS IN BRACKETS [ ] ARE MILLIMETERS TOLERANCES ARE :	THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF CIRCUIT ASSEMBLY CORPORATION. CIRCUIT ASSEMBLY CORPORATION RESERVES ALL PATENT, PROPRIETARY, DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREOF, AND TO ANY ARTICLE DISCLOSED HEREIN EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPOSED IN COMPLIANCE WITH...		CODE IDENT NO. <b>52072</b>
DECIMALS .X ±.25 ANGLES ±3° XX ±.13	DO NOT SCALE DRAWING		DRAWING NO. <b>620337</b>
			REV. <b>G</b>
			SCALE: 2:1
			SHEET 1 OF 2

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
	SEE SHEET 1 OF 2		

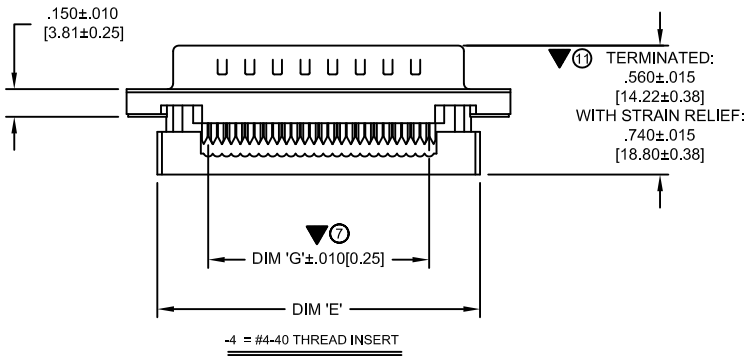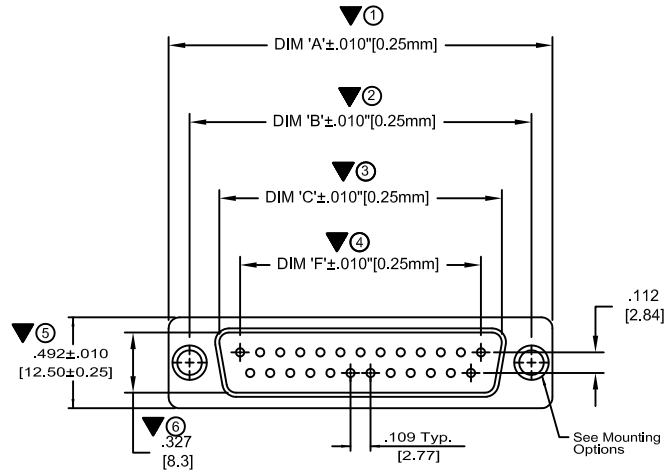

**TABULATION :**

NO. OF POSITIONS	DIM. 'A'	DIM. 'B'	DIM. 'C'	DIM. 'D'	DIM. 'E'	DIM. 'F'	DIM. 'G'
9	1.21 [30.8]	.984 [25.00]	.667 [16.95]	.62 [15.7]	.89 [22.5]	.436 [11.08]	.400 [10.16]
15	1.54 [39.2]	1.311 [33.30]	.996 [25.30]	.94 [24.0]	1.21 [30.8]	.763 [19.39]	.800 [17.78]
25	2.09 [53.1]	1.854 [47.10]	1.534 [38.96]	1.49 [37.9]	1.76 [44.7]	1.309 [33.24]	1.200 [30.48]
37	2.73 [69.4]	2.500 [63.50]	2.182 [55.42]	2.14 [54.5]	2.41 [61.3]	1.963 [49.86]	1.800 [45.72]

DIMENSIONS ARE IN INCHES TOLERANCES ARE:		APPROVALS	DATE	<b>CIRCUIT ASSEMBLY CORP.</b> 3A VANDERBLT, IRVINE, CALIFORNIA 92618-2030
DECIMALS .XX ±.010 .XXX ±.005	ANGLES 45°	DRAWN <b>D. LANG</b>	2-2-00	
DIMENSIONS IN BRACKETS [X.XX] ARE MILLIMETERS TOLERANCES ARE:		CHECKED <b>A. JOCHEN</b>	2-2-00	<b>CONNECTOR ASSEMBLY - DPID SERIES</b> <b>CA-XXDPID-X-SR</b> <b>"RoHS"</b>
DECIMALS .X ±.25 .XX ±.13	ANGLES 45°	THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF CIRCUIT ASSEMBLY CORPORATION. CIRCUIT ASSEMBLY CORPORATION RESERVES ALL PATENT, PROPRIETARY, DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREOF, AND TO ANY ARTICLE DISCLOSED HEREIN EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY RIGHTS.		
DO NOT SCALE DRAWING		SIZE <b>C</b>	CODE IDENT NO. 52072	DRAWING NO. <b>620337</b>
		SCALE: 2:1		REV. <b>G</b>
				SHEET 2 OF 2