

4


3

2

1

PART NO. CA-XXP-XXX-XX

REVISIONS				
LTR	DESCRIPTION	DATE	APPROVED	
A	INITIAL RELEASE SEE DO 4547	C.P. 7-5-01	AJ	
B	SEE DO 4616	C.P. 9-10-01	AJ	
C	SEE DO 4630	C.P. 9-25-01	AJ	
D	SEE DO 5580	C.P. 8-26-04	AJ	
E	SEE DO 6130	C.P. 6-27-06	AJ	
F	SEE DO 6279	C.P. 11-17-06	AJ	

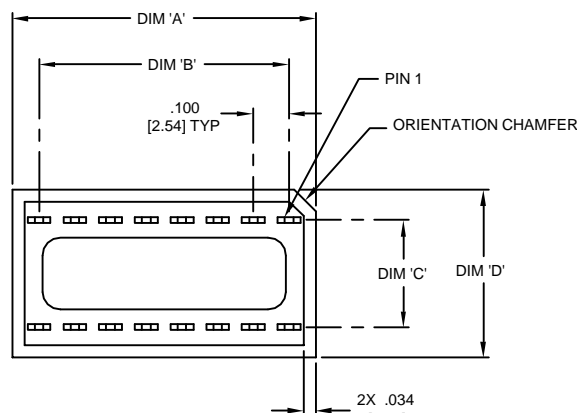

CA-XXP-XXX-XX

NO. OF POS. _____

PLUG STANDARD, FORK _____



PLATING _____

BLANK = TAIL AREA : .000010 [.00025] GOLD
 FORK AREA : .000150 ±.000025 [.00381±.00064] TIN
 UNDERPLATE : .000075 [.00190] NICKEL

T = .000150 ±.000025 [.00381±.00064] TIN
 OVER .000075 [.00190] NICKEL

CONTACT STYLE _____

TAIL LENGTH	FORK HEIGHT
02 = .190 [4.83]	.060 [1.52]
04 = .150 [3.81]	.060 [1.52]
11 = .190 [4.83]	.100 [2.54]
12 = .150 [3.81]	.100 [2.54]

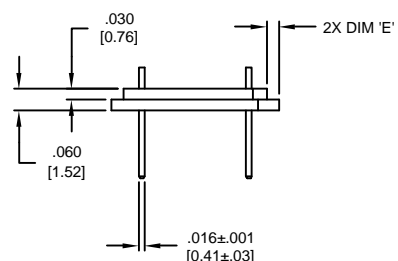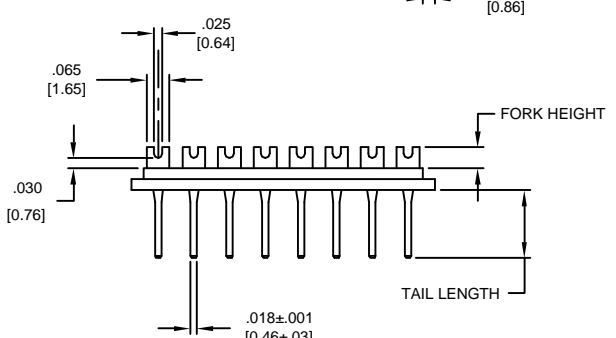

CONFIGURATION (Add if required) _____

BLANK = STANDARD WIDTH
 NW = NARROW WIDTH

- SPECIFICATIONS :**
- ENVIRONMENTAL :**
 TEMPERATURE RANGE : -65°C TO +125°C
- MECHANICAL :**
 INSULATOR MATERIAL : GLASS FILLED NYLON, BLACK, UL94V-0
 CONTACT MATERIAL : BRASS, CDA 260
- ELECTRICAL :**
 CURRENT RATING : 1 AMP
 VOLTAGE RATING : 300 Vrms
 DIELECTRIC WITHSTANDING VOLTAGE : 500 Vrms MIN.
 INSULATION RESISTANCE : > 5000 Megohms

TABULATION :

NO. OF POS	DIM 'A'		DIM 'B'		DIM 'C'		DIM 'D'		DIM 'E'	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
08	.450	[11.43]	.300	[7.62]	.300	[7.62]	.470	[11.94]	.034	[0.86]
14	.750	[19.05]	.600	[15.24]	.300	[7.62]	.470	[11.94]	.034	[0.86]
14-NW	.750	[19.05]	.600	[15.24]	.300	[7.62]	.395	[10.03]	.024	[0.61]
16	.850	[21.59]	.700	[17.78]	.300	[7.62]	.470	[11.94]	.034	[0.86]
16-NW	.850	[21.59]	.700	[17.78]	.300	[7.62]	.395	[10.03]	.024	[0.61]
18	.950	[24.13]	.800	[20.32]	.300	[7.62]	.470	[11.94]	.034	[0.86]
20	1.050	[26.67]	.900	[22.86]	.300	[7.62]	.470	[11.94]	.034	[0.86]
24	1.250	[31.75]	1.100	[27.94]	.600	[15.24]	.795	[20.19]	.034	[0.86]
28	1.450	[36.83]	1.300	[33.02]	.600	[15.24]	.795	[20.19]	.034	[0.86]
40	2.050	[52.07]	1.900	[48.26]	.600	[15.24]	.795	[20.19]	.034	[0.86]

1. MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT. (ROHS)

NOTES : UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES TOLERANCES ARE:	APPROVALS DRAWN CUONG P CHECKED A.JOCHEN	DATE 6/29/01 7/05/01	CIRCUIT ASSEMBLY CORP. 18 THOMAS ST., IRVINE, CALIFORNIA 92618-2777 DIP PLUG STANDARD, FORK STYLE SERIES 'P' "ROHS COMPLIANT"
DECIMALS .010 ± 3' .XX ± .005 DIMENSIONS IN BRACKETS [X.XX] ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS .010 ± 3' .XX ± .005 DO NOT SCALE DRAWING	THIS INFORMATION AND DESIGN DISCLOSED HEREIN WAS OBTAINED BY AND IS THE PROPERTY OF CIRCUIT ASSEMBLY CORPORATION. CIRCUIT ASSEMBLY CORPORATION RESERVES ALL PATENT, PROPRIETARY, DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREIN. AND TO ANY ARTICLE DISCLOSED HEREIN EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY RIGHTS.		
SCALE: 4 : 1		SHEET 1 OF 1	

4

3

2

1