

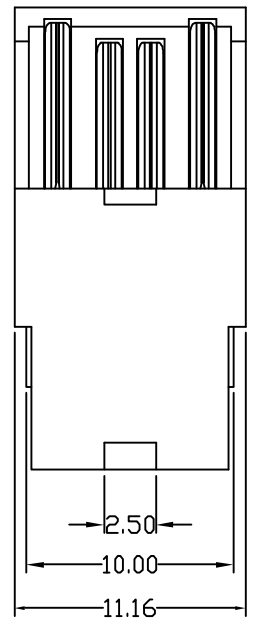
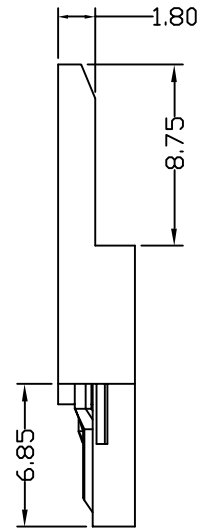


P/N 04USBPAV1-0LX-X

REV.	DESCRIPTION	ECN.	APPD.
A	NEW	05\20\03	RobbieL
B	SEE DO	Eric 03/26/07	RobbieL

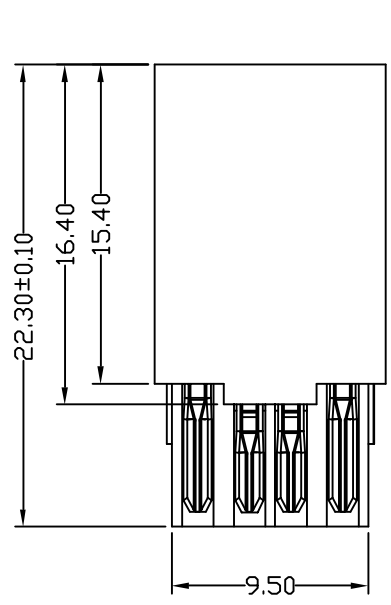

XX USB X X X X-X X X-X X

POSITION 04

PRODUIT DESCRIPTION
USB=UNIVERSAL SERIAL BUS CONNECTOR

CONNECTOR STYLE
S=SOCKET
P=PLUG

CONNECTOR TYPE
A= A TYPE B= B TYPE

PROFILE
R= 90° V= 180°

LAYER
1= SINGLE LAYER 2= DUAL LAYER
3= THREE LAYER 4= FOUR LAYER


LAYOUT PROFILE
S=SMT D=DIP
C=CRIMP 0= SOLDER



BASE TYPE
S=SHORT TYPE
L=LONG TYPE

PLATING
A= 1u" B= 3u"
C= 15u" F= 30u"

COLOR
B= BLACK W= WHITE

NOTES:
BASE:PBT+25%GF UL94V-0
CONTACT:BRASS

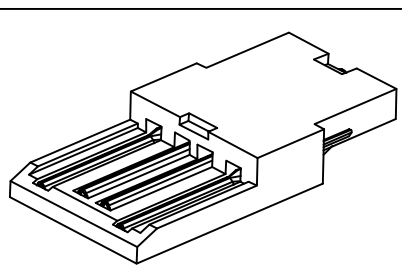

MILLIMETERS	INCH	UNITS	MM	NAME(INTENDED USE)	 CIRCUIT ASSEMBLY SHENZHEN CA INDUSTRIAL BUILDING, AOXING ROAD, AOB2 SECOND VILLAGE, HENGGANG TOWN, SHENZHEN CITY, GUANGDONG PROVINCE, CHINA.
X° ± 2°	X° ± 2°	MAT'L		PART NO.(INTENDED USE)	
.X ± 0.25	.X ± .004	FINISH		04USBPAV1-0LX-X	USB A TPE PLUG SOLDER (ROHS)
.XX ± 0.13	.XX ± .002		APPD: Robbie05/18/03	DWG NO.:	H611018
.XXX ± ----	.XXX ± ----	Q'TY		CHKD: ERIC 05/18/03	 SCALE SHEET REV. 1/1 1/1 A
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CIRCUIT ASSEMBLY SHEN ZHEN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF CIRCUIT ASSEMBLY SHEN ZHEN				DR: TONY 05/18/03	