



P/N CA-H713006

REV.	DESCRIPTION	D.O.	APPD.
A	INITIAL RELEASE	H3249	Ray

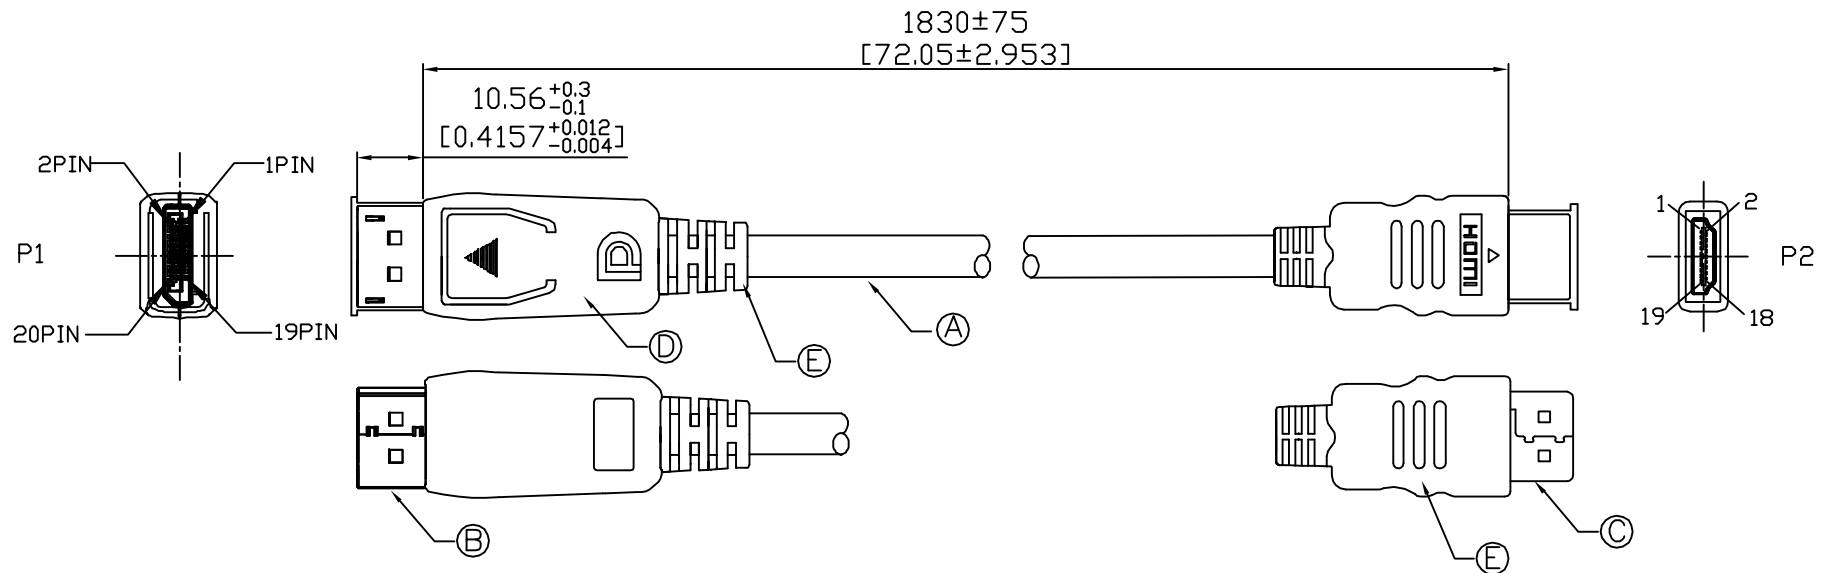


NOTE:

- ELECTRICAL SPECIFICATION:
 - CABLE MUST PASS CONTINUITY TEST;
 - INSULATION RESISTANCE:10M ohm Min;
 - CONDUCTOR RESISTANCE:2 ohm Max;
 - HI-VOLTAGE: 300V DC/0.1SEC.
- MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT.(ROHS)

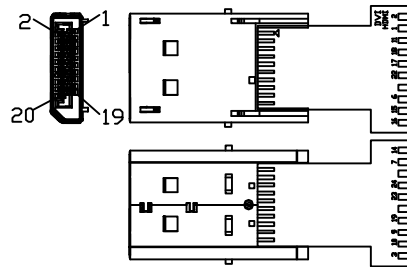

DP CONNECTOR

PIN Assignment

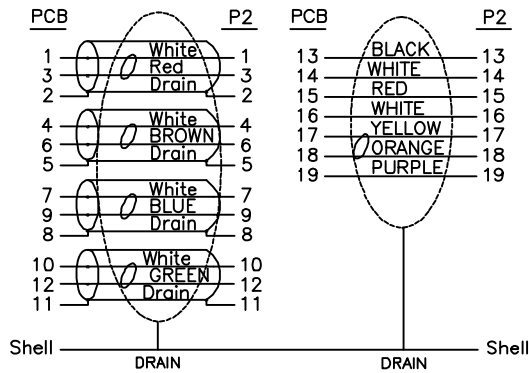

ITEM	DESCRIPTION	QTY	UNITS
E	UL 94V-0 PVC 45P,COLOR:BLACK	N/A	KG
D	DISPLAYPORT BOTTOM AND TOP COVER,BLACK ABS	1	SET
C	HDMI 19P/M,CONTACT GOLD 3u",NI PLATED SHELL	1	PCS
B	DISPLAYPORT MALE,CONTACT GOLD 3u",NI PLATED SHELL,WITH PCB	1	SET
A	UL20276(#30*1P+D+AM)*4PCS+#30*1P+#30*5C+AEB,OD:5.5MM,BLACK PVC JACKET	N/A	M

MILLIMETERS	INCH	UNITS	MM	NAME(INTENDED USE)	CIRCUIT ASSEMBLY SHENZHEN CA INDUSTRIAL BUILDING, AOKING ROAD, A08B1 SECOND VILLAGE, HENGANG TOWN, SHENZHEN CITY, GUANGDONG,PROVINCE,CHINA.
X ^o ± 2'	X ^o ± 2'	MAT'L		20P DP/M TO HDMI/M CABLE ASS'Y	
.X± 0.3	.X± .012	SEE NOTE		PART NO.(INTENDED USE)	TITLE:
.XX± 0.15	.XX± .006	FINISH		CA-H713006	20P DP/M TO HDMI/M CABLE ASS'Y
.XXX± ----	.XXX± ----	SEE NOTE		APPD: Ray 03/12/09'	DWG NO.: H713006
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CIRCUIT ASSEMBLY SHEN ZHEN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF CIRCUIT ASSEMBLY SHEN ZHEN				Q'TY	CHKD: Andy 03/12/09'
				DR: Joyce 03/12/09'	SCALE SHEET REV. NONE 1/1 A