

## VERTICAL STACKING SOCKET

### SPECIFICATIONS

#### **ENVIRONMENTAL**

Temperature Range: -40°C to +105°C

#### **MECHANICAL**

Insulator Material: High Temp Thermoplastic, **BLACK**, UL94V-0

Contact Material: Phosphor Bronze

Contact Plating: See options below

#### **ELECTRICAL**


Current Rating: 1 AMP

Consult factory for additional options

CA-  VS2-   -

POSITION	TYPE	PLATING	PKG
10 32	10 = 6.4mm ht, SMT, no pegs	A = gold flash	1 = trays
14 34	31 = 7mm ht, thru hole, no pegs	C = 15µ IN gold	2 = trays w/pad
16 40	40 = 7mm ht, SMT with pegs		3 = tube w/pad
20 50			
26 80		Gold flash plating is standard	Tray packaging without pad is standard

**NOTE:** Actual insulator color is black. Images are gray to show detail

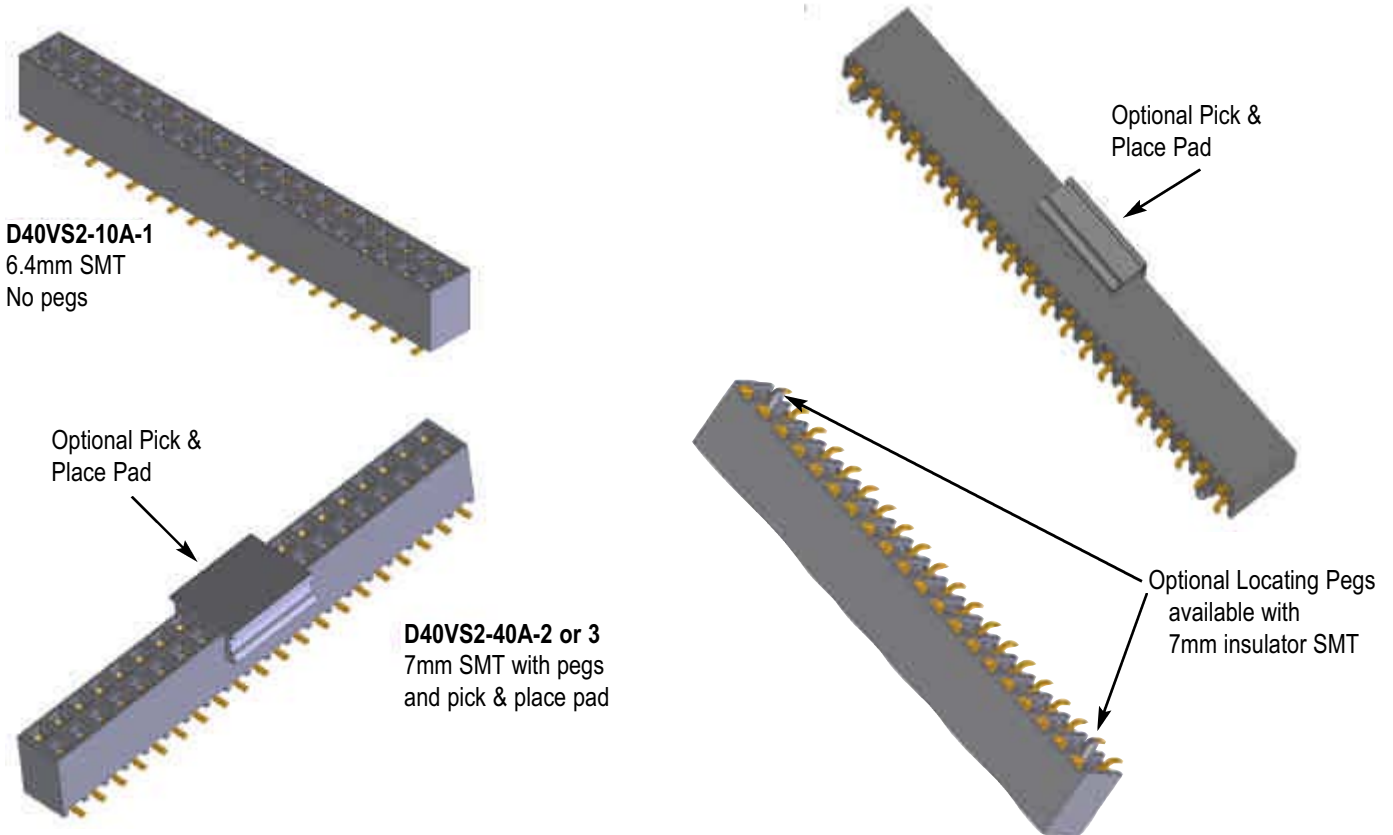

Drawing Numbers: CA-610338 (6.4mm) CA-610339 (7mm)

UL Pending

For more information please contact our customer service department or visit our website at [circuitassembly.com](http://circuitassembly.com)

**Circuit Assembly Worldwide Hqtrs.** 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298

**Circuit Assembly Asia Hqtrs.** 1F, No. 12 Lane 24, Ho Ping Rd., Pan Chiao City, Taipei Hsien, Taiwan Tel +886 2-2951-9916 Fax +886 2-2954-9126