

Pitch: .100"

MODULAR, .025" SQUARE SYSTEM, SINGLE ROW BOARD STACKING HEADER

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled thermoplastic, black, UL94V-0

Contact Material: Copper Alloy

Contact Plating: Gold Flash

ELECTRICAL

Current Rating: 1 AMP

Consult factory for additional options

CA-C19- POSITION - POST A- STACK - DIM C

POSITION = 02 - 40


POST = Dim A (post extension)

STACK = Dim B (overall stacking height)

Customer to determine A & B dimensions to meet their specifications.

DIMENSION C (overall pin length)

- _____ .440
- _____ .530
- _____ .630
- _____ .730
- _____ .830
- _____ .930
- _____ 1.030
- _____ 1.130
- _____ 1.230
- _____ 1.400
- _____ 1.500

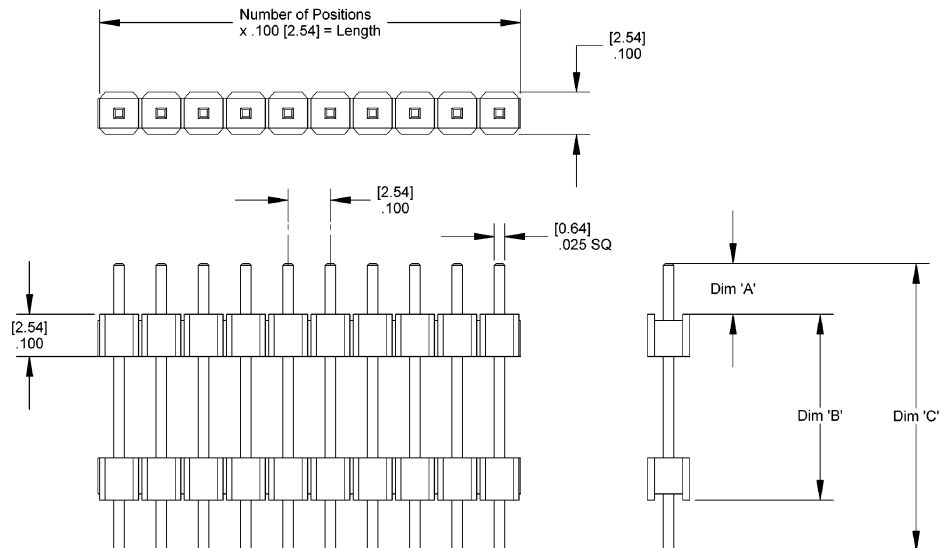

Mating Product: VSC (page 117), VSCR (page 119), PCB
Drawing Number: CA-620398



5