



D-SUB, HIGH DENSITY PLUG, SOLDER CUP

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled thermoplastic, black, UL94V-0

Shell Material: Steel

Contact Material: Brass

Contact Plating: Gold Flash

ELECTRICAL



Current Rating: 1 AMP

Consult factory for additional options

CA- POSITION DHDPS

POSITION	
15	44
26	62

DIMENSIONS						
Position	A	B	C	D	E	F
15	1.21 [30.9]	.98 [25.0]	.666 [16.92]	.760 [19.30]	.090 [2.29]	.0451 [1.145]
26	1.55 [39.3]	1.31 [33.3]	.994 [25.25]	1.09 [27.70]	.090 [2.29]	.0451 [1.145]
44	2.09 [53.1]	1.85 [47.1]	1.534 [38.96]	1.62 [41.20]	.090 [2.29]	.0451 [1.145]
62	2.73 [69.5]	2.50 [63.5]	2.182 [55.42]	2.26 [57.50]	.095 [2.41]	.0474 [1.205]

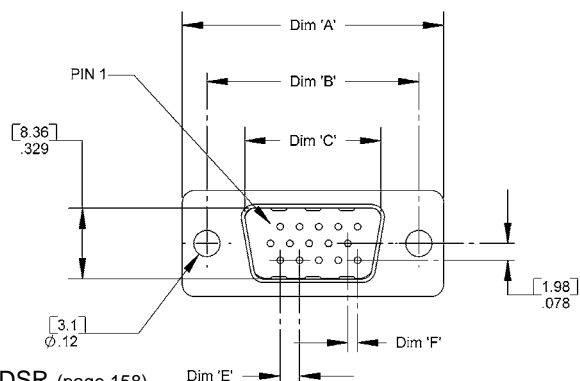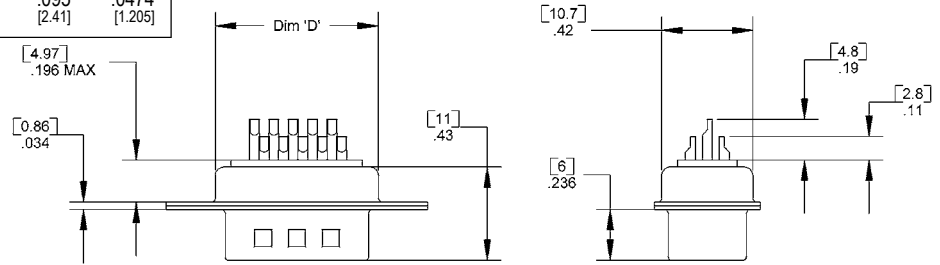

Mating Product: DHDS (page 158), DHDSR (page 158)
 Drawing Number: CA-620414

