

MODULAR, SCREW MACHINE SYSTEM, STRIP HEADER

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +125°C

MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Brass

Contact Plating: 10µ IN gold


ELECTRICAL

Current Rating: 1 AMP

Consult factory for additional options

CA- SERIES POSITION MP-F1B

SERIES	POSITION
S = Single Row	Single 01 thru 36
D = Dual Row	Dual 04 thru 72

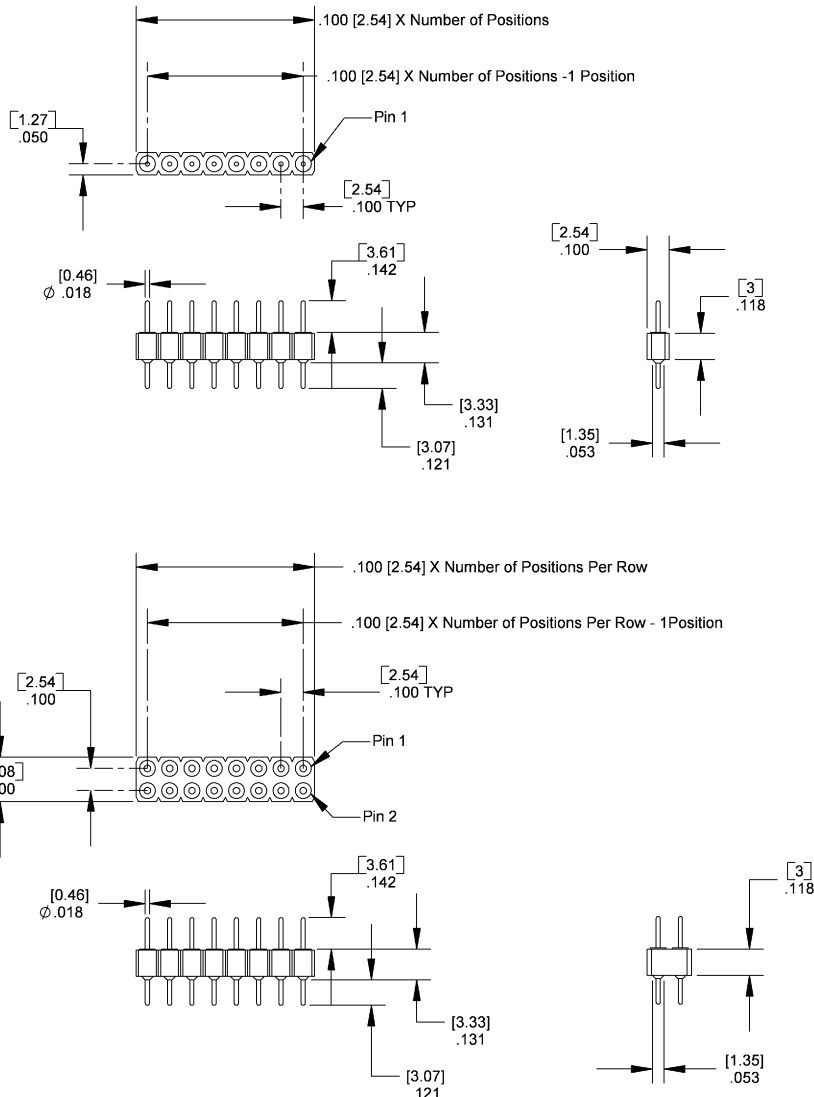

Mating Product: MS (page 121)
 Drawing Number: CA-620424