

Pitch: .100"

MODULAR, .025" SQUARE SYSTEM, STRIP HEADER RIGHT ANGLE

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Phosphor Bronze

Contact Plating: See options below


ELECTRICAL

Current Rating: 1 AMP

Consult factory for additional pin length options

CA- SERIES POSITION R-24 PLATING -10

| SERIES | POSITION | PLATING |
|----------------|--------------------|----------------------------|
| S = Single Row | Single 01 thru 36 | B = 10µ gold |
| D = Dual Row | Dual 02 thru 72 | C = 15µ sel gold |
| T = Triple Row | Triple 03 thru 108 | T = 150µ IN 90/10 tin/lead |

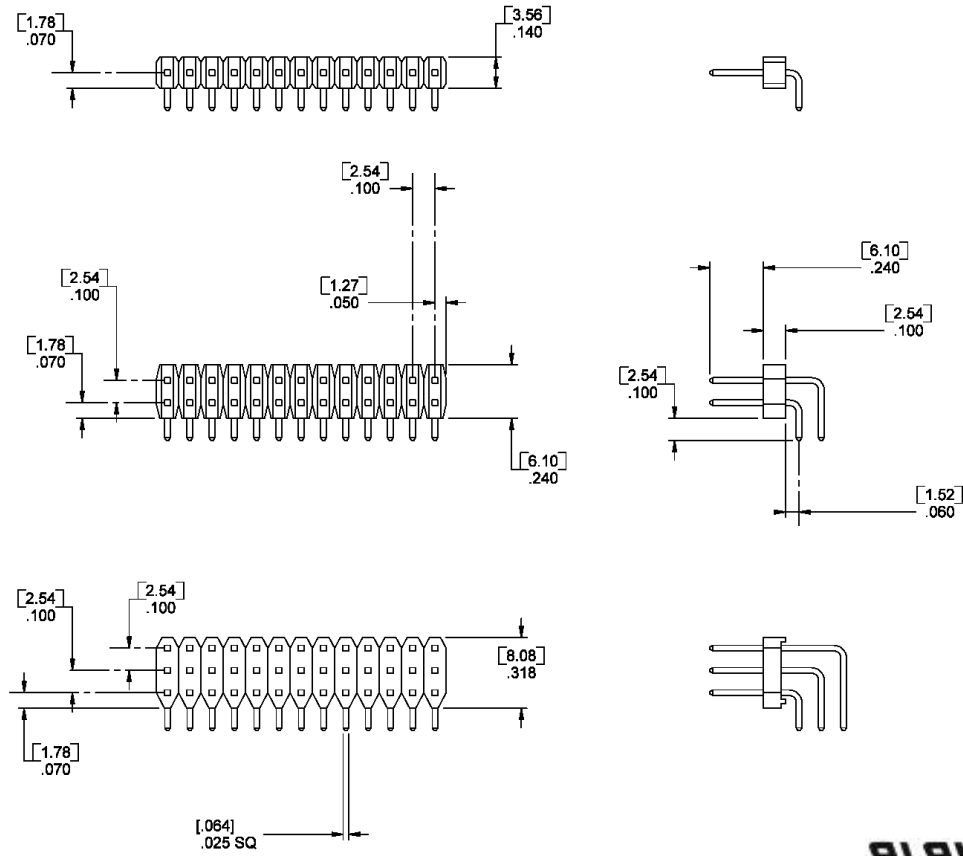

Mating Product: IDS2, FID, SJ, VSC
Drawing Number CA-620391



For more information please contact our customer service department or visit our website at circuitassembly.com