

DIP PACKAGING SOCKET RIGHT ANGLE

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +125°C

MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Phosphor Bronze

Contact Plating: See options below

ELECTRICAL


Current Rating: 1 AMP

Consult factory for additional options

CA- S- RAC1-01

POSITION		PLATING
14	18	10 = 10µ IN gold
16	20	T = Tin

DIMENSIONS		
Position	A	B
14	.745 [18.92]	.600 [15.24]
16	.845 [21.46]	.700 [17.78]
18	.945 [24.00]	.800 [20.32]
20	1.045 [26.54]	.900 [22.86]

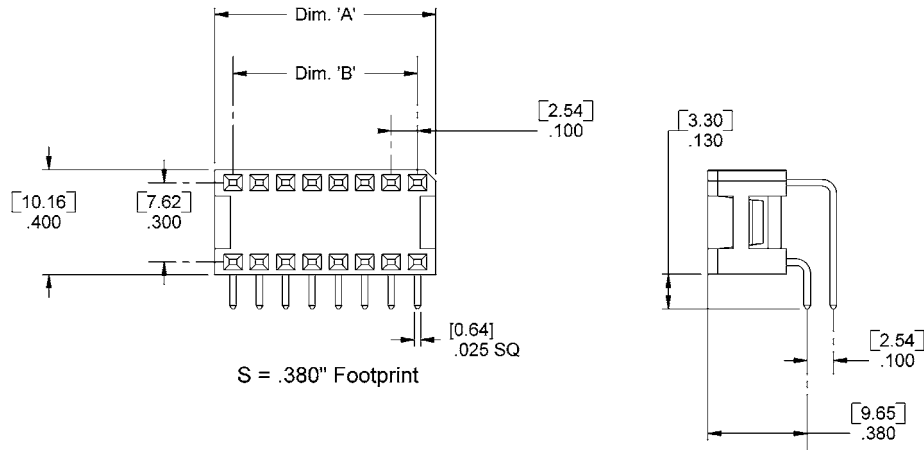

Mating Product: IDPB (page 84), IDP2 (page 85), Dip plugs (page 158)

Drawing Number CA-610218 (S)

For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 3A Vanderbilt, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298