



RIBBON IDT PLUG

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled thermoplastic, black, UL94V-0

Contact Material: Copper Alloy

Shell Material: See options below

Contact Plating: Gold Flash

Terminates To: .050" cable, 28 AWG

ELECTRICAL


Current Rating: 1 AMP

Consult factory for additional configurations

CA- POSITION RPID-3 SHELL -SR

POSITION	SHELL
36	Blank = Metal
50	P = Plastic

DIMENSIONS		
Position	A	B
36	2.420 [61.47]	1.445 [36.70]
50	3.020 [76.71]	2.040 [51.82]

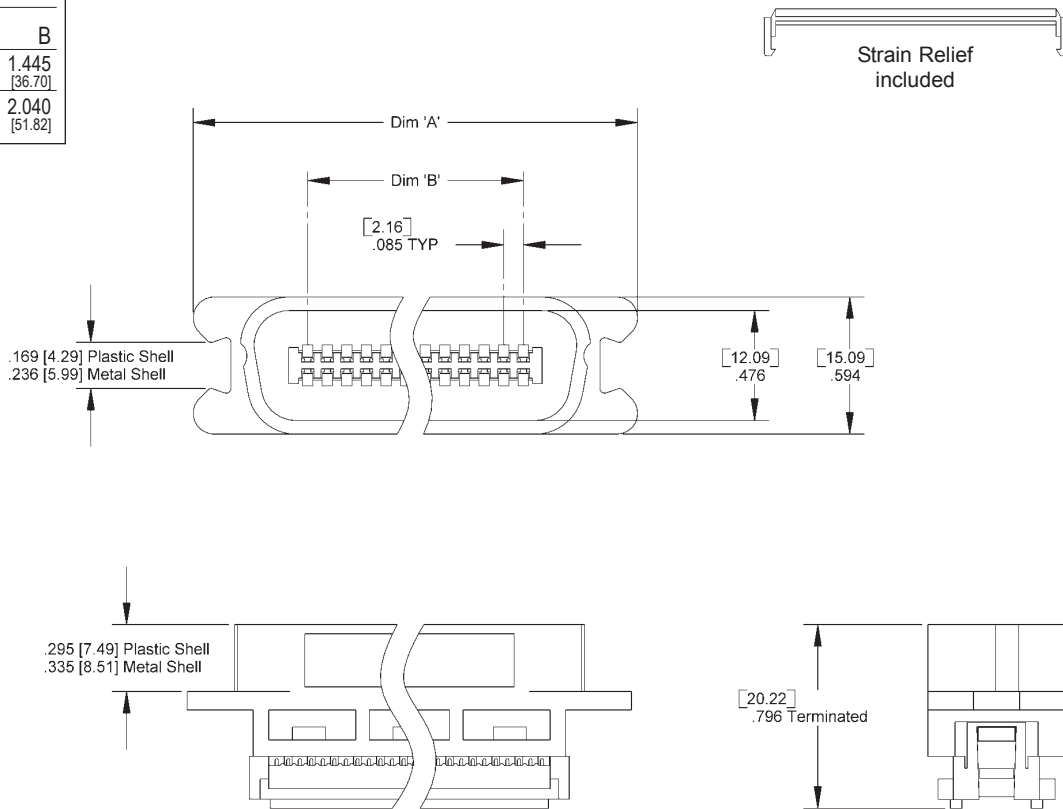

Mating Product: RSID
Drawing Number CA-620339



For more information please contact our customer service department or visit our website at circuitassembly.com