

MODULAR, .025" SQUARE SYSTEM, SINGLE ROW IC SOCKET

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled thermoplastic, black, UL94V-0

Contact Material: Phosphor Bronze

Contact Plating: See options below

ELECTRICAL


Current Rating: 1 AMP

Consult factory for additional options




CA-S POSITION STL- PLATING TAIL

POSITION	PLATING	TAIL
01 thru 36	10 = 10µ IN gold	SD = Solder Dip
	T = 250µ IN tin	1WW = 1 level wrap, .300"
		2WW = 2 level wrap, .405"
		3WW = 3 level wrap, .625"

7

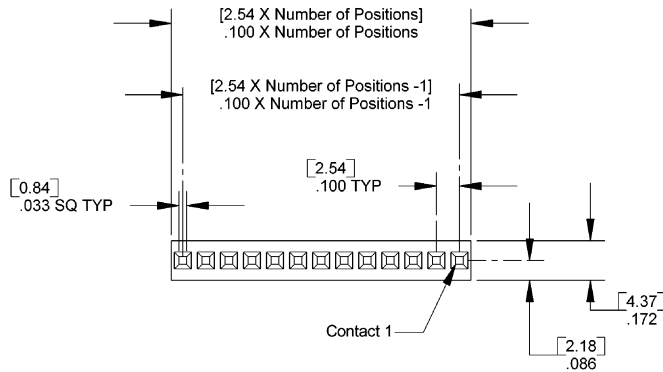

Mating pin size .022 x .020 max.

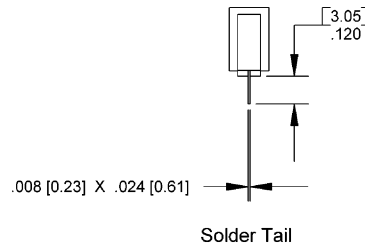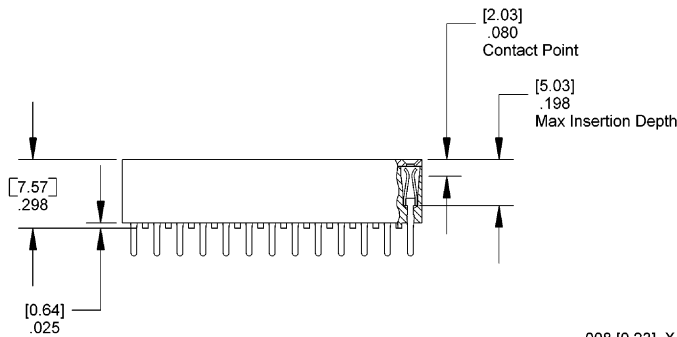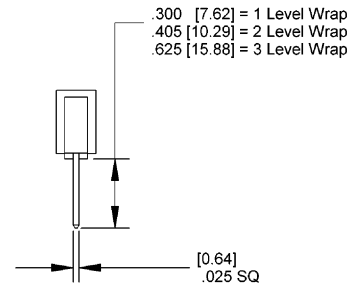

Drawing Number CA-610004