

2MM CENTER STRIP SOCKET

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled thermoplastic, black, UL94V-0

Contact Material: Copper Alloy

Contact Plating: Gold Flash

ELECTRICAL


Current Rating: 1 AMP

Consult factory for additional options

CA- SERIES POSITION VS-11A

SERIES	POSITION
SM = Single	40 = single row of 40
DM = Dual	80 = dual rows of 40

DIMENSIONS in millimeters		
Position	A	B
40 single row	80.00 [3.14]	78.00 [3.07]
80 dual row	80.00 [3.14]	78.00 [3.07]

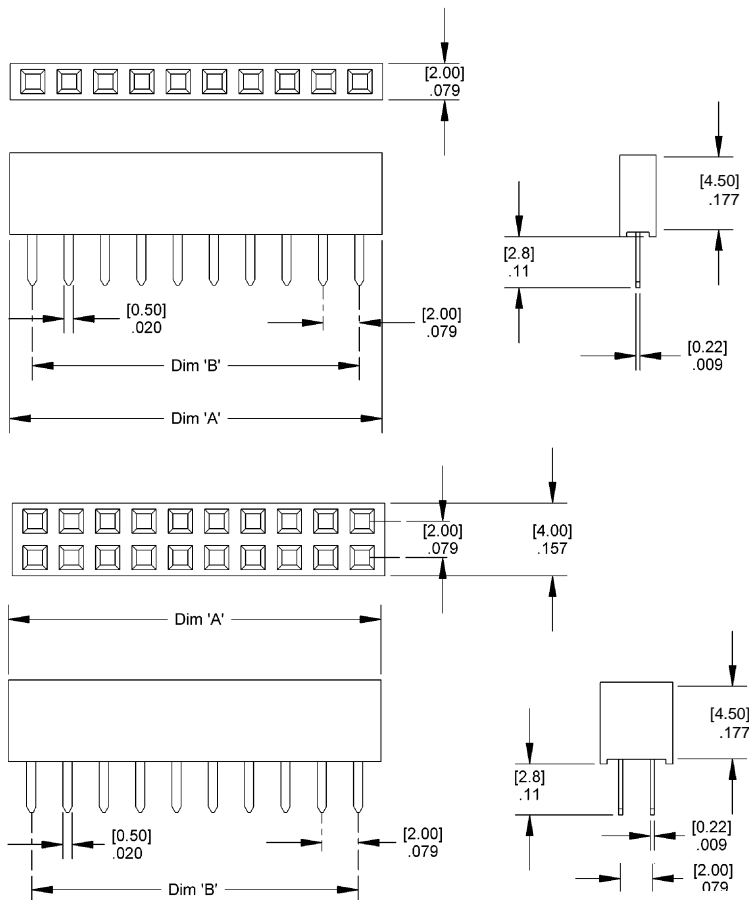

Mating Product: CA-SM, CA-DM (page 122)

Drawing Number: CA-610207



For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298