

Pitch: .100"

## MODULAR, SCREW MACHINE SYSTEM, STRIP HEADER

### SPECIFICATIONS

#### ENVIRONMENTAL

Temperature Range: -40°C TO +105°C

#### MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Brass

Contact Plating: 10µ IN gold


#### ELECTRICAL

Current Rating: 3 AMP

Consult factory for additional options

CA- SERIES POSITION MP-F1B

| SERIES         | POSITION          |
|----------------|-------------------|
| S = Single Row | Single 01 thru 40 |
| D = Dual Row   | Dual 04 thru 80   |

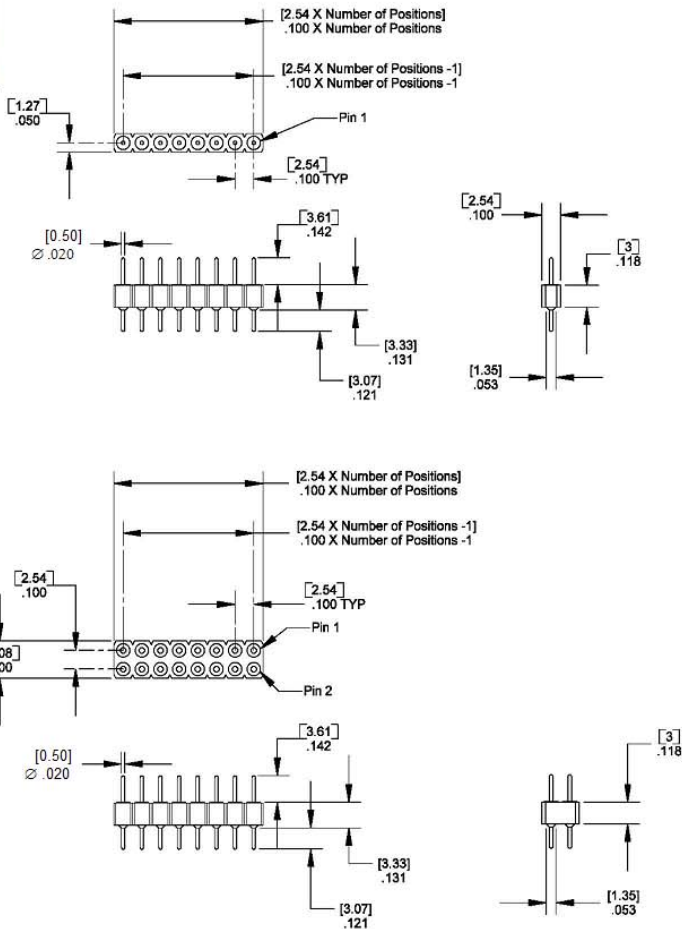

Mating Product: MS, MSR  
 Drawing Number CA-620424

For more information please contact our customer service department or visit our website at [circuitassembly.com](http://circuitassembly.com)