

DIP PACKAGING SOCKET LOW PROFILE SCREW MACHINE

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Beryllium Copper

Sleeve Material: Brass

Contact Plating: Contact: 15µ IN gold
Sleeve: 200µ IN tin

ELECTRICAL



Current Rating: 1 AMP

Consult factory for additional options

CA- POSITION MS-1C

POSITION	
06	18
08	20
14	22
16	24

DIMENSIONS				
Position	A	B	C	D
06	.300 [7.62]	.200 [5.08]	.300 [7.62]	.399 [10.13]
08	.400 [10.16]	.300 [7.62]	.300 [7.62]	.399 [10.13]
14	.700 [17.78]	.600 [15.24]	.300 [7.62]	.399 [10.13]
16	.800 [20.32]	.700 [17.78]	.300 [7.62]	.399 [10.13]
18	.900 [22.86]	.800 [20.32]	.300 [7.62]	.399 [10.13]
20	1.000 [25.40]	.900 [22.86]	.300 [7.62]	.399 [10.13]
22	1.100 [27.94]	1.000 [25.40]	.400 [10.16]	.499 [12.67]
24	1.200 [30.48]	1.100 [27.94]	.600 [15.24]	.699 [17.75]

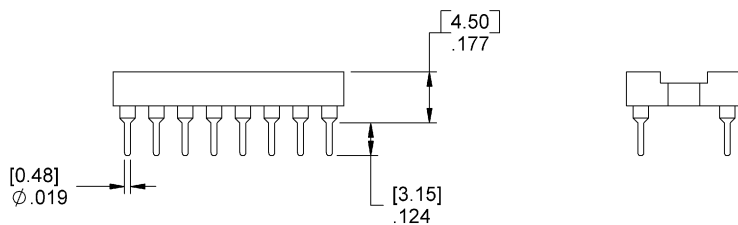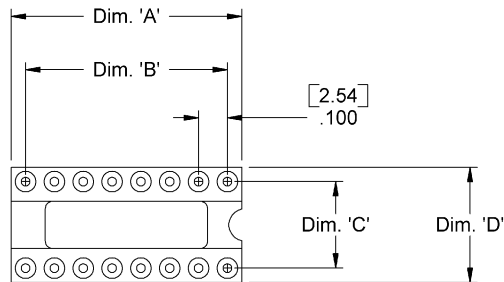

Mating Product: MP (page 160-161)
Drawing Number CA-610210