



## DIP PACKAGING SOCKET .300" HIGH END STACKABLE, WIRE WRAP

### SPECIFICATIONS

#### ENVIRONMENTAL

Temperature Range: -55°C to +125°C

#### MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Phosphor Bronze

Contact Plating: See options below

#### ELECTRICAL




Current Rating: 1 AMP

Consult factory for additional options

CA-  SE-   WW

POSITION	PLATING	TAIL LENGTH
14	10 = 10μ IN gold	1 = .31"
16	T = tin	2 = .41"
		3 = .63"

DIMENSIONS				
Position	A	B	C	D
14	.698 [17.72]	.600 [15.24]	.300 [7.62]	.395 [10.03]
16	.798 [20.26]	.700 [17.78]	.300 [7.62]	.395 [10.03]

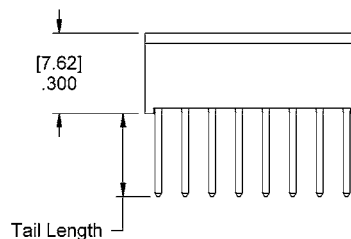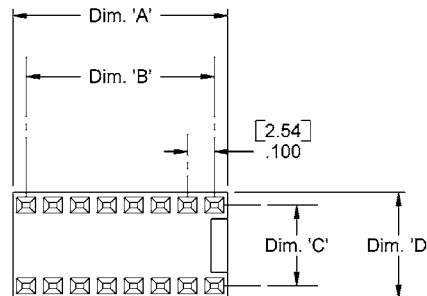

Mating Product: IDPB (page 84), IDP2 (page 85), Dip plugs (page 158)  
Drawing Number CA-610217