

## MODULAR, .025" SQUARE SYSTEM, SINGLE ROW IC SOCKET

### SPECIFICATIONS

#### ENVIRONMENTAL

Temperature Range: -55°C to +105°C

#### MECHANICAL

Insulator Material: Glass-filled thermoplastic, black, UL94V-0

Contact Material: Phosphor Bronze

Contact Plating: See options below

#### ELECTRICAL


Current Rating: 1 AMP

Consult factory for additional options

CA-S  STL-

POSITION	PLATING	TAIL
01 thru 36	10 = 10µ IN gold T = 250µ IN tin	SD = Solder Dip 1WW = 1 level wrap, .300" 2WW = 2 level wrap, .405" 3WW = 3 level wrap, .625"

7

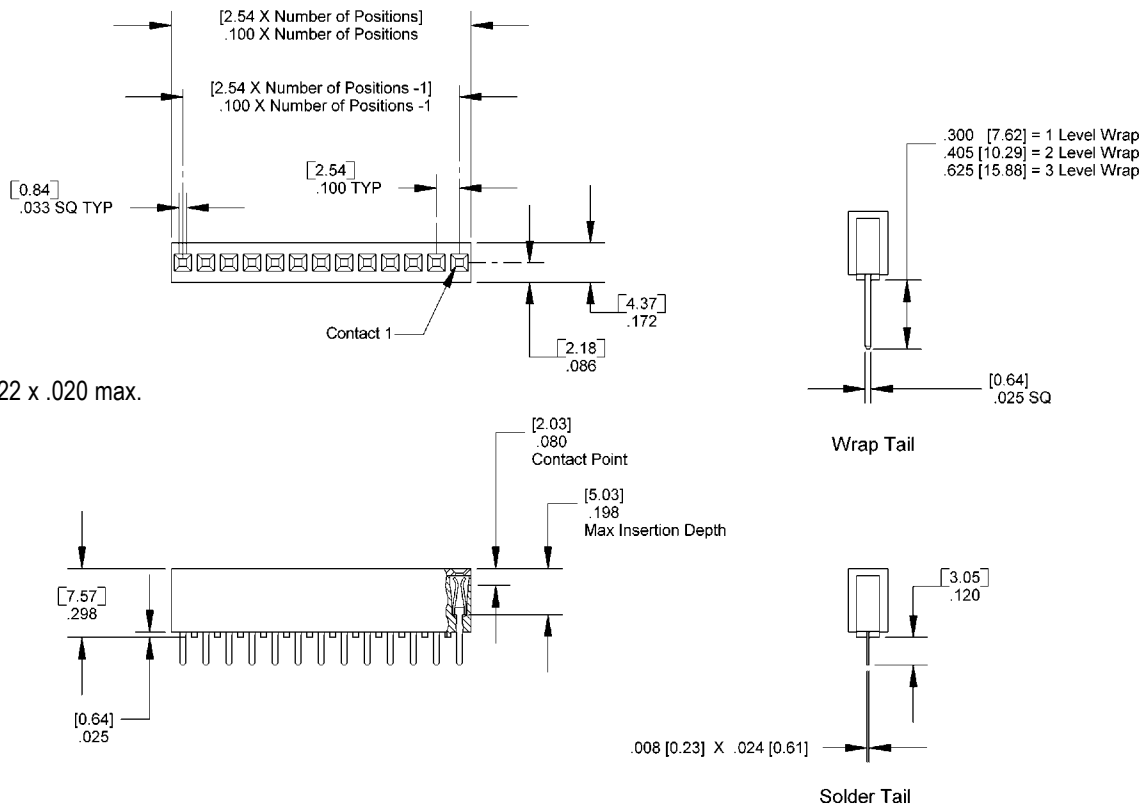

Mating pin size .022 x .020 max.

Drawing Number CA-610004